


HOLLAND STANDARD

SERIES 55

NAVIGATION LIGHTS SERIES 55

Application	For vessels > 20 - < 50m For inland waterways without limitation of ship's length
Protection degree	IP56
Housing	Polycarbonate, glass fibre reinforced, other components of non-corrosive materials. Non magnetic, seawater resistant, housing colour black
Cable insert	PG13,5 with buckling protection
Lamp base	BAY 15d
Light source (not incl.)	Incandescent lamp 12V/24V - 25W BAY 15d
Mounting	Base flange attachment, 4 screws diameter 8mm (not included). All lights may also be hoisted

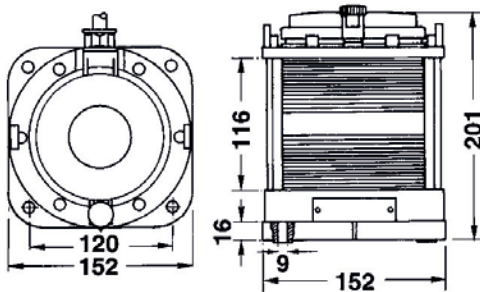

PART NO.

3535110000	Starboard, 2 nm
3534210000	Port, 2 nm
3532010000	Masthead, 5 nm
3533710000	Stern, 2 nm
3533410000	Stern yellow, 2 nm
3531710000	All round white/anchor/RIM, 2 nm
3531210000	All round red/NUC, 2 nm
3531110000	All round green, 2 nm

WEIGHT

1,3 kg
1,3 kg
1,3 kg
1,3 kg
1,3 kg
1,2 kg
1,2 kg
1,2 kg

Bulb (not included):

LAMP12V-25W incandescent lamp 12V 25W BAY 15d

LAMP24V-25W incandescent lamp 24V 25W BAY 15d