
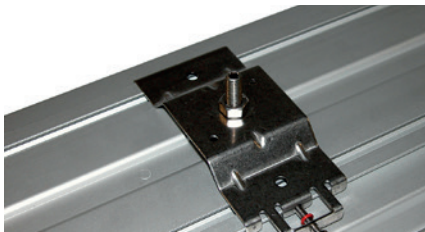


HOLLAND STANDARD

TX60

TX60 EX ZONE 1 OUTDOOR LUMINAIRE LED

Application	Ex Zone 1 and Zone 2 areas
Protection degree	IP66/67
Housing	Seawater resistant anodized aluminium
Optic	Soft opalic polycarbonate diffuser
Cable entry	M25-Polyamide, 07-17mm dia.
Light source	LED (2 x 12W or 2 x 24W)
Mounting	GL version with brackets, AS version with bolts, mounting distance adjustable

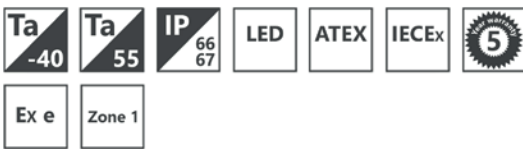

AS mounting system



GL mounting system

PART NO.

TX60095000	2200 850 230 M25 GL
TX60095400	2200 850 230 M25 AS
TX60695000	4500 850 230 M25 GL
TX60695400	4500 850 230 M25 AS

WEIGHT

4,0 kg
3,8 kg
7,3 kg
7,1 kg

Battery backup

TX60195600	2200 850 230 HFE3 M25 AS
TX60795600	4500 850 230 HFE3 M25 AS

5,7 kg
9,0 kg