



WATERPRESSURE TIGHT LUMINAIRE

Absolutely safe up to 20 m underwater



- Application:** Decks, submerged areas
- Protection degree:** IP68 h 20
- Reflector and gear tray:** Zinc coated steel sheet
- Finish:** Powder coated white RAL 9016
- Cover tube:** Clear polycarbonate 4mm thickness, Polycarbonate end caps white
- Cable entry:** Plastic M20
- Lamp base:** G13 / 2G11
- Light source (not incl.):** T26 / T38 / TG-L (short version)
- fluorescent lamp:** 18 / 20W, 36 / 40W
- Mounting:** 2 fixing clamps: stainless steel or polycarbonate (clamps are not part of supply, please order separately)



1x18W



1x36W

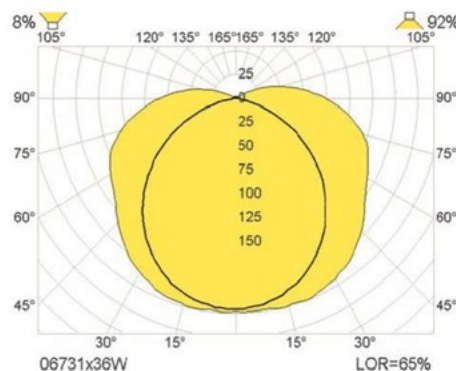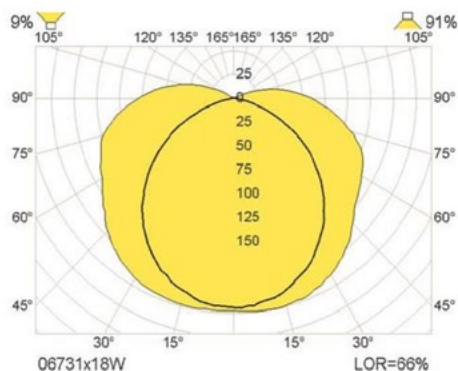

PART NO.

WEIGHT

Standard version:

0673006000 1 x 18W/20W 230V 50Hz h.p.f.c.~ M20 x 1,5	2.6kg
0673008000 1 x 18W/20W 220V 60Hz h.p.f.c.~ M20 x 1,5	2.6kg

With through wiring:

0673006001 1 x 18W/20W 230V 50Hz h.p.f.c.~ 2 x M20 x 1,5	2.7kg
0673008001 1 x 18W/20W 220V 60Hz h.p.f.c.~ 2 x M20 x 1,5	2.7kg

Standard version:

0673306000 1 x 36W/40W 230V 50Hz h.p.f.c.~ M20 x 1,5	3.5kg
0673308000 1 x 36W/40W 220V 60Hz h.p.f.c.~ M20 x 1,5	3.5kg

With through wiring:

0673306001 1 x 36W/40W 230V 50Hz h.p.f.c.~ 2 x M20 x 1,5	3.7kg
0673308001 1 x 36W/40W 220V 60Hz h.p.f.c.~ 2 x M20 x 1,5	3.7kg

Pressure watertight luminaires LED *h.p.f.c.~ compensated version (with capacitor)*

Standard version:

0673102000* 1x10W LED, 110-230V 50/60Hz, -35/+45C	1.7kg
0673104000* 1x20W LED, 110-230V 50/60Hz, -35/+45C	2.3kg

With through wiring:

0673102001* 1x10W LED, 110-230V 50/60Hz, -35/+45C	1.7kg
0673104001* 1x20W LED, 110-230V 50/60Hz, -35/+45C	2.3kg

Fixing clamps:

- [8027300900](#) Polycarbonate (1 pc)
- [8105400900](#) Stainless steel (1 pc)

