



ISO 9001 CERTIFIED

DNH

HEAD OFFICE, NORWAY

DNH AS

Phone..... + 47 35 98 56 00

Fax..... + 47 35 98 56 10

E-mail..... dnh@dnh.no

Web-Site..... www.dnh.no

ENGLAND

DNH WW Ltd

Phone..... + 44 1908 275 000

Fax..... + 44 1908 275 100

E-mail..... dnh@dnh.co.uk

GERMANY

DNH GmbH

Phone... + 49 040 6569 30-0

Fax..... + 49 040 6569 30-30

E-mail..... dnh@dnh.de

USA




DNH Speakers Inc

Phone..... + 1 484 494 5790

Fax..... + 1 484 494 5793

E-mail..... dnh@dnhspeakers.com

CAP-15WCR(T)

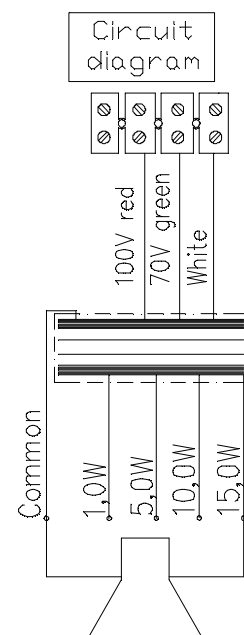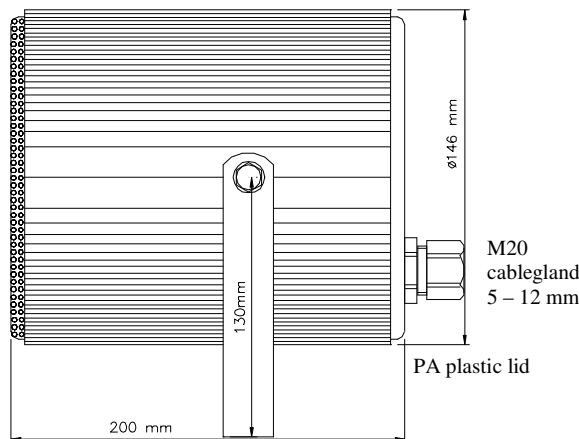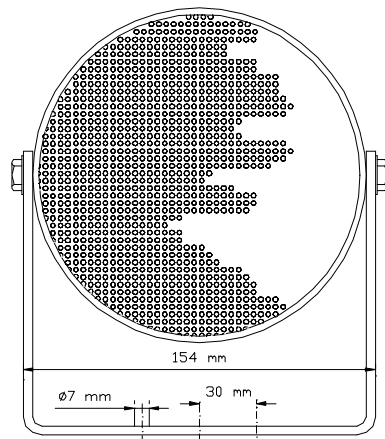

Sound pressure levels at 1W/1m

SPL vs Freq



Specifications

Material / Color	(Aluminum/PA)/RAL9010 or anodized
Mounting	Bracket
Termination	Inside screw terminal
Weight w/transformer	2,4 kg
IP-rating	55
Max. / min. amb. temp	90°C / -40°C
Rated / max. power	15 W / 15 W
SPL 1W/1m	85 dB
SPL rated power	96 dB
Effective freq. range	125 – 12000 Hz
Dispersion (-6dB) 1kHz / 4kHz	170° / 55°
Directivity factor, Q	NA
Options	Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- Fasten bracket with 2 – 3 screws.
- Remove lid by 4 screws, lead cable through the cable gland and connect to terminal 70V (white – green) or 100V (white – red).
- Choose required power on the transformer.
- Screw lid back into place by 4 screws with a torque of 1 - 2 Nm to assure the IP rating.
- CAP-15WCR(T) is designed for clean room applications.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

DNH reserves the right to alter specifications without notice

