


Specification	
Operating voltage	8 to 42V DC
Rated voltage	19V DC
Quiescent current	approx 45µA at 19V DC
Alarm current	typ. 9mA, pulsed
Ambient temperature	-20°C to +70°C
Storage temperature	-30°C to +75°C
IP rating	IP43, IP55 with Cover
Material housing	ASA-plastic
Colour	Red
Weight	approx. 110g
Part no.	MCP - 804971/Cover - 704965 Surface mount base - 704980
Origin	Germany

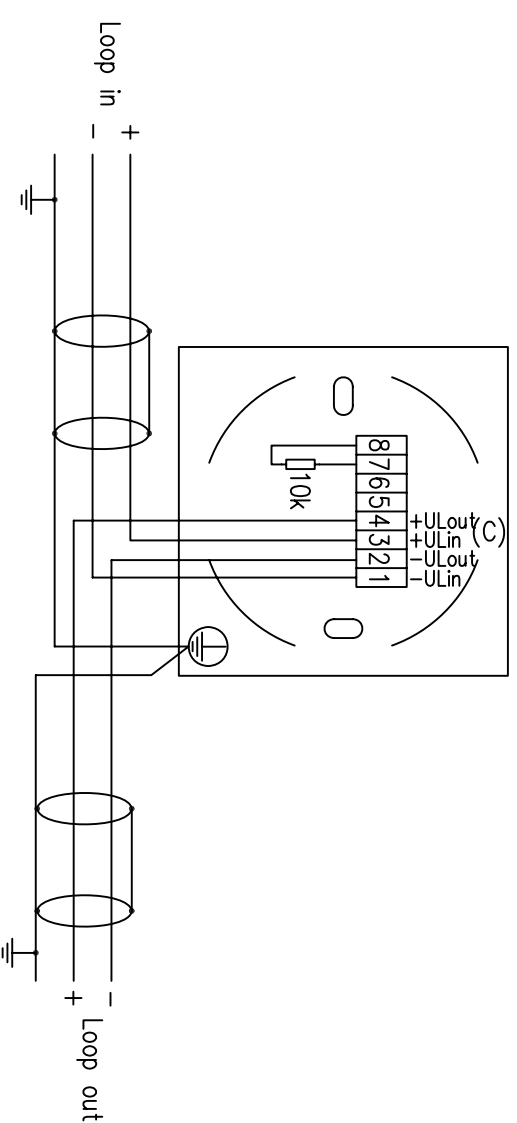

Sym.	Ant./Qty.	Forordring/Alteration	Kontrol/Controlled	Målestokk/Scale	Date/Sign.
				1:2	
Date/Date		Konstr./Design	Godkjent/Approved	Copyright © Etek Fire & Safety. All Rights Reserved	
2005-08-11		Tegnet/Drawn		Erst. for/Replace for	
Arkiv/Archive		tem		Erst. av/Replaced by	
ifs					
General Production Drawing					
IQ8 Manual Call Point w/isolator					
Henvisning/Reference			Ordre nr./Order no.		Konsulent/Consultant
					T39952-N3