

# Maritime Products and Solutions

Premium Visibility Solutions  
for demanding maritime  
and offshore use



# Premium Visibility Solutions

for demanding maritime and offshore use

The Luminell Group is passionate about delivering critical light solutions for demanding use, creating the industry standard in marine lighting, and establishing supportive and lasting relationship with its customers, staff and the community at large.

The Luminell series of solutions offer powerful lighting, outstanding functionality, provide increased safety, and a longer than average lifetime of use despite the strain of extreme environments. Our LED light solutions also boast an average 80% decrease in energy output, decreasing your environmental footprint. It is clear why the Luminell range of lights have become the first choice for many shipyards, ship designers, government bodies, rigs and vessels carrying out hazardous and important work.

The Luminell Group has offices in Norway, Sweden and the USA, where all Luminell products are proudly Scandinavian designed and manufactured and sold globally. Challenging the established, pushing the known boundaries of design and technology, and a sincere desire to help its users, has been, and is still the drive behind Luminell. Experience the Luminell difference today.

Our team are ready to assist in finding the best solution for you!



# Table of Contents

## RLX Series LED Floodlights

page 6-10



## RLX Ex Series LED Floodlights

page 11-16



## BLX Series LED Bowlights

page 17-21



## SLX Series LED Searchlight modules

page 22-29



## SL Series LED Searchlights with/without integrated IR

page 32-43



## CL Series HID Searchlights

page 44-49



## CL Series HID Searchlights with integrated IR

page 50-55



## CL Series System Overview

page 56-59

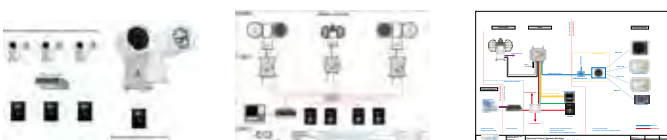










Photo: Seaconics

# Powerful LED floodlights for extreme environments

- Flicker Free
- Made to handle shocks and vibrations over time
- Seawater resistant and "easy clean" design
- No maintenance
- Designed and produced in Scandinavia
- Dimmable
- Compact, robust and sealed
- Excellent EMC characteristics
- Encapsulated internal electronics
- No ballast required
- Available for hazardous areas
- Corrosion class C5m



**RLX™ B**  
 FLOODLIGHT



**RLX™ C**  
 FLOODLIGHT



**RLX™ D**  
 FLOODLIGHT Gen2



**RLX™ D**  
 FLOODLIGHT Gen3





# 100-277 VAC

**RLX™ C**  
FLOODLIGHT


**RLX™ D**  
FLOODLIGHT Gen2

**RLX™ D**  
FLOODLIGHT Gen3

## Input Specifications

Input voltage range	100 - 277 VAC	100 - 277 VAC	100 - 277 VAC
Frequency range	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Rated power	80W	160W	240W
Alternative rated power	40W <sup>1</sup>	N/A	N/A
Current at 230VAC	0,35 A (80W)	0,75 A	1,04 A
Leakage current	<0,75 mA /227 VAC	<0,75 mA /227 VAC	0,5 mA /230 VAC
Inrush current (50% I-peak @ 230VAC)	~65A (445 μs)	~65A (445 N/A)	200A (150 μs)
Light Control / DIM	Optional: 0-100KΩ or 0-10V (5-100%)	N/A	0-100KΩ, 0-10V or 0-10VDC (0-100%)

## Light Specifications

Initial luminous flux @ Ta 25°C	10.776	21.552	30.684
Color rendering index (CRI)	min. 70	min. 70	min. 70
Color temperature 	5.000 K (+ - 500 K) <sup>2</sup>	5.000 K (+ - 500 K) <sup>2</sup>	5.000 K (+ - 500 K)
Beam angles	10° spot beam - 110° wide beam (see last page)		

## General Specifications

Startup time	1 sec.	1 sec.	1 sec.
Operating ambient temperature (Ta)	- 40°C to + 55°C	- 40°C to + 55°C	- 40°C to + 55°C
Storage temperature	- 40°C to + 80°C	- 40°C to + 80°C	- 40°C to + 80°C
Weight (apx.)	6.5 kg	10.5 kg	14,5 kg
Cable gland	1xM20 (6-13mm)	1xM20 (6-13mm)	1xM20 (6-13mm)
Blind caps	1xM20	1xM20	1xM20, 2xM25
IP class	IP 66/67	IP 66/67	IP 66/67
Lifetime prediction (L70) @ Ta 45°C	110.000 hrs	110.000 hrs	110.000 hrs
Corrosion class	C5m ISO 9223/12944 (for offshore and maritime environments) For more information see document "Lifetime Prediction RLX™." on our website.		



## Materials





Body / casing / chassis	Seawater resistant; casted, anodized, and powder coated aluminium
Glass	Tempered glass (Polycarbonate on request)
Bracket, bolts, nuts, etc.	Stainless steel AISI 316L (1.4404), A4

## Other Compliances

Description	<b>Standard</b>
LED modules for general lightning	IEC 62031
Photobiological safety	IEC 62471: 2009 (Low risk - RG1)
EMC radiated emissions	DNVGL EMC Class A and B - IEC/EN 60945
Radiated and conducted	MIL-STD461F/G CE102 and RE102 (Only RLX D with protection guard)
EMC immunity	EN 61000-4-2,3,4,5,6,8,11 (Surge 4 kV)
ETL / cETL certified	EANSI/UL1598, ANSI/UL1598A, ANSI/UL 8750 and CSA C22.2 No.250.0

<sup>1</sup> On request


<sup>2</sup> Also available in 3.000 K (Warm White)

12/24VDC		24VDC	
			
Input Specifications			
Input voltage range	9 - 36 VDC	19 - 30 VDC	19 - 30 VDC
Rated power	40W	80W / 120W	160W / 240W
Current at 24V	1,6A	3,33A / 5A	6,67A / 10A
Light Control / DIM	N/A	0-100KΩ or 0-10V (0-100%)	0-100KΩ or 0-10V (0-100%)
Light Specifications			
Initial luminous flux @ Ta 25°C	5.000	10.600 / 14.000	21.200 / 28.000
Color rendering index (CRI)	min. 70	min. 70	min. 70
Color temperature	 5.000 K (+ - 500 K)	5.000 K (+ - 500 K)	5.000 K (+ - 500 K)
Beam angles	40° + 60° beam	10° spot beam - 110° wide beam (see last page)	
General Specifications			
Startup time	1 sec.	1 sec.	1 sec.
Operating ambient temperature (Ta)	- 40°C to + 55°C	- 40°C to + 55°C	- 40°C to + 55°C
Storage temperature	- 40°C to + 80°C	- 40°C to + 80°C	- 40°C to + 80°C
Weight (apx.)	1,5 kg	6.5 kg	10.5 kg
Cable gland	3m 2x1,5mm² cable	1xM20 (6-13mm)	1xM20 (6-13mm)
Blind caps	N/A	1xM20	1xM20
IP class	IP 66/67/68	IP 66/67	IP 66/67
Lifetime prediction (L70) @ Ta 45°C	110.000 hrs	110.000 hrs	110.000 hrs
Corrosion class	C5m ISO 9223/12944 (for offshore and maritime environments) For more information see document "Lifetime Prediction RLX.." on our website.		
Materials			
Body / casing / chassis	Seawater resistant; casted, anodized, and powder coated aluminium		
Glass	Tempered glass (Polycarbonate on request)		
Bracket, bolts, nuts, etc.	Stainless steel AISI 316L (1.4404), A4		
Other Compliances			
Description	Standard		
LED modules for general lightning	IEC 62031		
Photobiological safety	IEC 62471: 2009 (Moderate risk - RG2) Do not stare at light source		
EMC radiated emissions	DNVGL EMC Class A and B - IEC/EN 60945		
Radiated and conducted	MIL-STD461F/G CE102 and RE102 (Only RLX D with protection guard)		
EMC immunity	EN 61000-2,3,4,6,8 (Surge 2 kV)		
ETL / cETL certified	ANSI/UL1598, ANSI/UL1598A, ANSI/UL 8750 and CSA C22.2 No.250.0 (not RLX B)		



## Dimensions and Mounting

Front view	Fig.1	Fig.2	Fig.3	Fig.4
Side view	Fig.5	Fig.6	Fig.7	Fig.8
Bracket	Fig.9	Fig.10	Fig.11	Fig.12

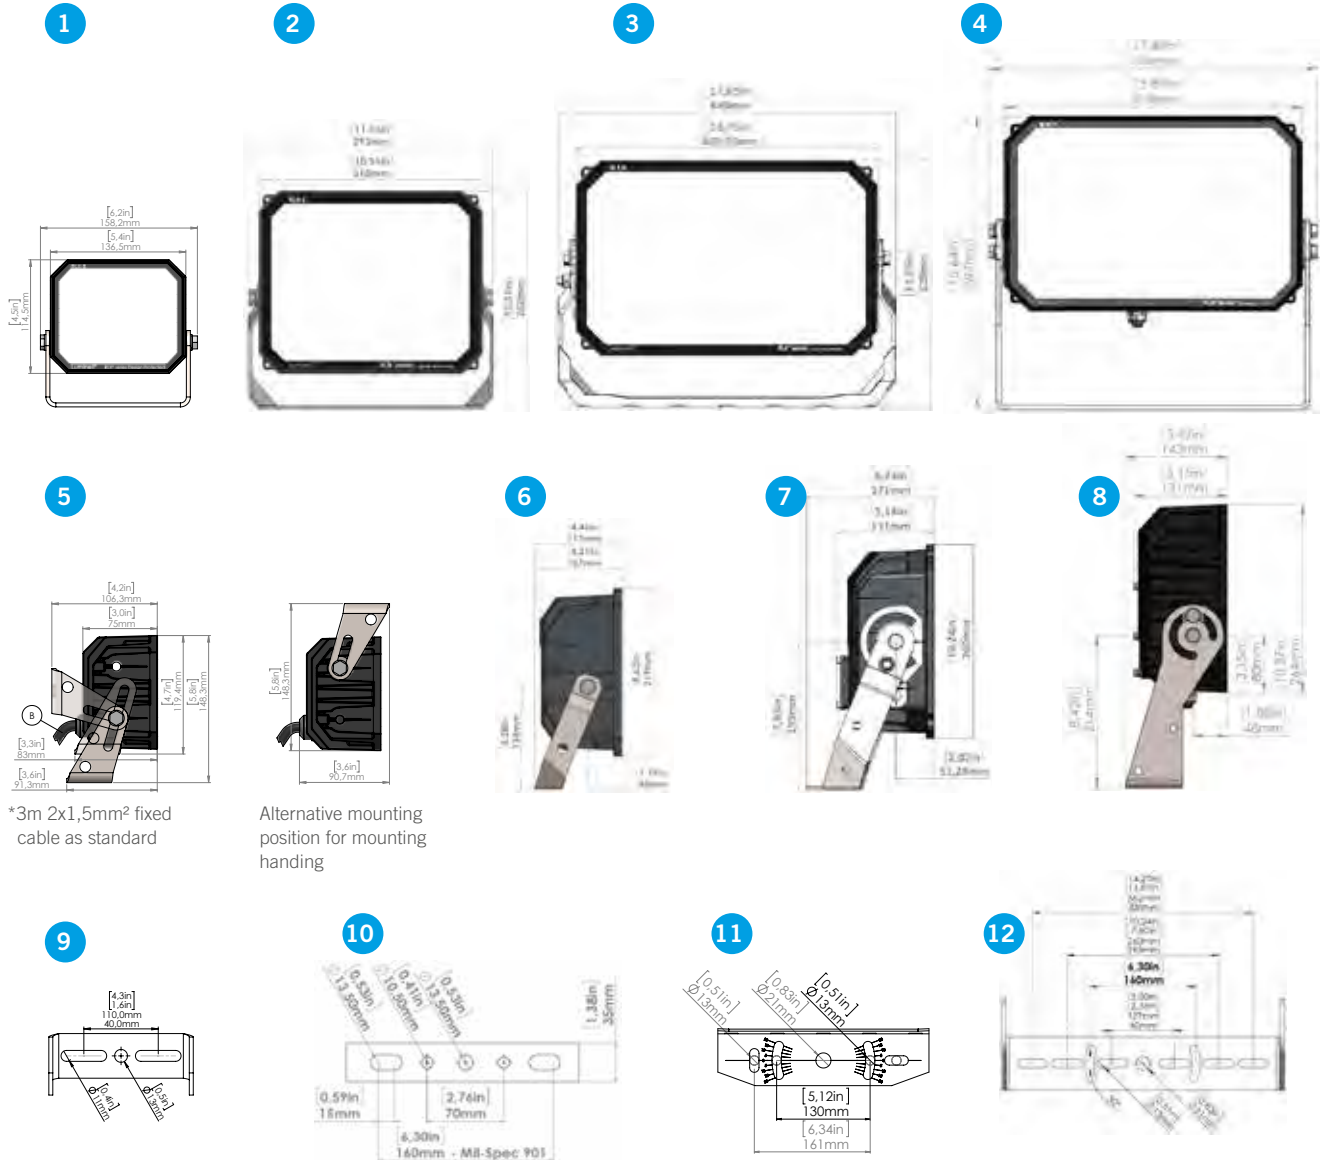

## Options and Accessories


- Anti-Ice kit
- Specialized products on request
- RLX B available in 6 pack




Protection grid



Damper  
(Pendulum mounting)




Connection Box Gel KIT  
(Only RLX D gen3)

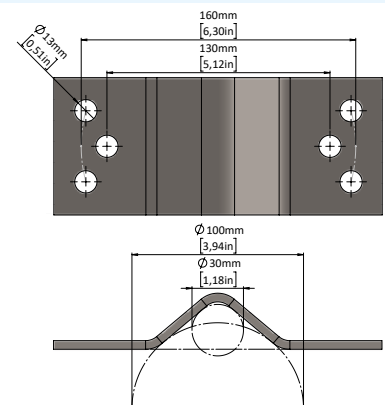

Pole mount bracket  
Ø30-100mm

### RLX™ Series, standard beam alternatives

Beam group	Beam code	Light projection – diameter, 10m distance	Color code
Spot beams	Spot10	2m	●
	Spot20	3m	
Medium beams	Medium30	5,4m	●
	Medium40	7m	
	Medium60	10m	
Wide beams	Wide	28m	●
	WideOffset	34m	
Oval beams	OvalH	8,2 x 2m	●
	OvalV	2 x 8,2m	

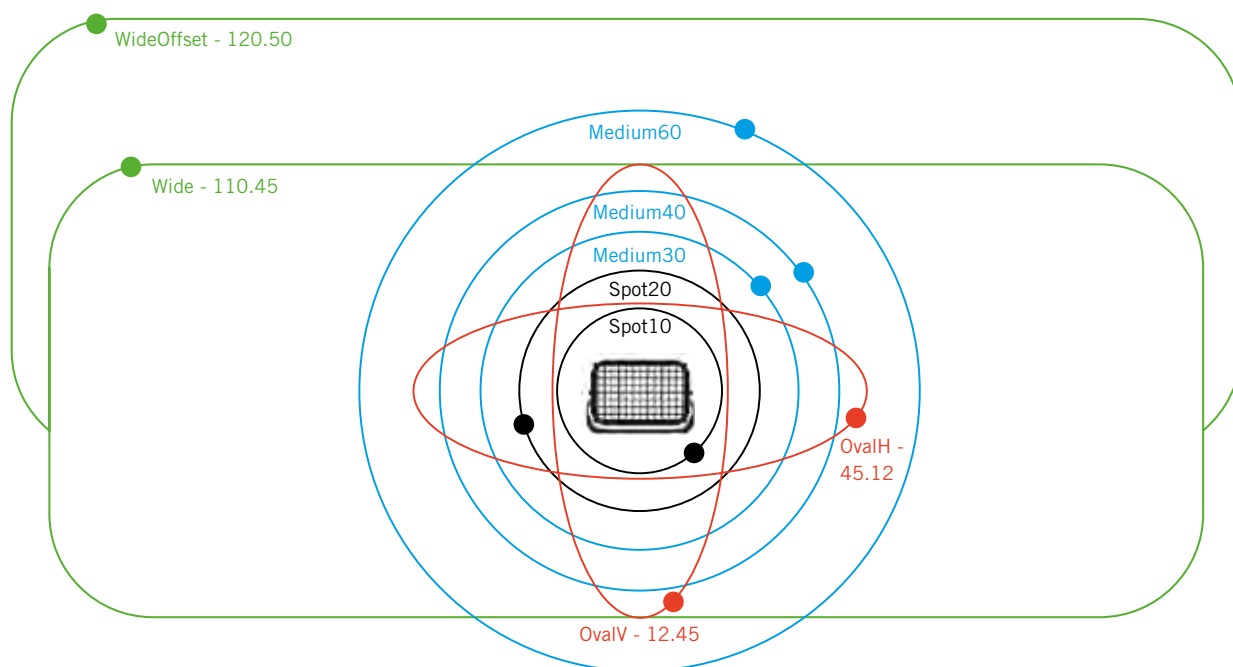

Specifications are subject to change at any point without prior notice.



# Zone 1 & 2 LED floodlights for extreme environments

**luminell®**  
Light Matters



Photo: Geert-Jan van Hest

- ATEX and IECEx approved. Zone 1, 2, 21 and 22
- Powerful light performance
- Compact and low weight
- Designed to be appreciated by the installer and the end user
- Wide operating temperatures
- Temperature classes T6/T5/T4/T3
- Extreme lifetime
- Light efficiency up to 80% from conventional lighting
- No flame path, no maintenance
- MIL-STD-461, excellent EMC/EMI characteristics
- Crafted for demanding marine and offshore conditions



Design protected

**RLX™ Cx**  
FLOODLIGHT Zone 1/21

Zone 1 and 21



Design protected

**RLX™ Dx**  
FLOODLIGHT Zone 1/21




Design protected

**RLX™ Dx**  
FLOODLIGHT Zone 2/21


Zone 2 and 21




## RLX CxZ1.21

Electrical Specifications	40 W	80 W	120 W	160 W
Input voltage range	100 - 277 VAC, 100 - 300 VDC			
Frequency range	50 - 60 Hz			
Power factor @ 230 VAC	cos ϕ < 0.9			
Current @ 230 VAC	0,17 A	0,35 A	0,52 A	0,7 A
Leakage current	0,5 mA RMS @ 230 VAC 50 Hz			
Recommended fuse	MCB16 type C for up to 10 floodlights connected in parallel			
Inrush current	50A (duration of 600µs measured @ 50% I-peak) at 230VAC			
Dim control interface	(10-100%) 0 - 100 kΩ, 4 - 20 mA or 0 - 10 VDC			
Terminal dimensions	Mains: 0,2 - 6 mm², Grounds: 0,2 - 16 mm², Dim and batteries: 0,08 - 2,5 mm² – spring terminals with looping (sketch available under “Dimensions”)			
Light Specifications				
Initial luminous flux	6.589	11.290	15.342	19.021
Lumen per watt	165	141	128	119
100% light output	Ta < 55°C		Ta < 45°C	
Color rendering index (CRI)	> 70			
Color temperature	 5.000 K ( 3.000 K on request)			
Beam angles (degrees)	Spot 15°, Medium 40°, Medium 60°, Medium 60° x 40°, Wide 80° x 60°, Oval 45° x 15°, See illustration on page 6 for more information. Photometric files available on request.			
Ex and Environmental				
Ambient temperature (Ta)	- 55°C to + 55°C			
Storage temperature	- 55°C to + 80°C			
Markings	Zone 1, 2, 21, 22			
ATEX classification	CE 2804 Ex II 2G II 2D			
IEC classification gas	Ex eb mb IIC T6 Gb	Ex eb mb IIC T4, T5** Gb	Ex eb mb IIC T4 Gb	Ex eb mb IIC T3, T4* Gb
IEC classification dust	Ex tb IIIC T85 Db	Ex tb IIIC T135, T100** Db	Ex tb IIIC T135 Db	Ex tb IIIC T200, T135* Db
Classification with alternative ambient temperature	*T4, T135 @Ta <40°C **T5, T100 @TA <50°C			
General Specifications				
Startup time	1 second			
Weight	9,7 kg (approx.)			
Cable glands	2xM25 10-18mm Through Gland 2xM20 Blind Cap Other glands and blind caps on request.			
IP class	IP 66/67			
Predicted lifetime L70 (70% light output) Ta 25°C	>320k hours	>320k hours	>320k hours	175k hours
Predicted lifetime L70 (70% light output) Ta 45°C	>180k hours	>120k hours	>100k hours	80k hours
Corrosion class	C5 m ISO 9223/12944 (for offshore and maritime environments)			



RLX DxZ1.21				RLX DxZ2.21
Electrical Specifications	80 W	160 W	240 W	240 W
Input voltage range	100 - 277 VAC, 100 - 300 VDC			
Frequency range	50 - 60 Hz			
Power factor @ 230VAC	cos ϕ < 0.98			
Current @ 230VAC	0,35 A	0,7 A	1,04 A	1,04 A
Leakage current	0,5 mA RMS @ 230 VAC 50 Hz			
Inrush current	200A (duration of 150µs measured @ 50% I-peak) at 230VAC			
Recommended fuse	MCB16 type C for up to 10 floodlights connected in parallel			
Dim control interface	(0-100%) 0 - 100 kΩ, 4 - 20 mA or 0 - 10 VDC			
Terminal dimensions	Mains: 0,2 - 6 mm², Grounds: 0,2 - 16 mm2, Dim and batteries: 0,08 - 2,5 mm² – spring terminals with looping (sketch available under “Dimensions”)			
Light Specifications				
Initial luminous flux	13.178	22.580	30.684	30.684
Lumen per watt	165	141	128	128
100% light output	Ta < 55°C			
Color rendering index (CRI)	> 70			
Color temperature	 5.000 K ( 3.000 K on request)			
Beam angles (degrees)	Spot 15°, Medium 40°, Medium 60°, Medium 60° x 40°, Wide 80° x 60°, Oval 45° x 15°, See illustration on page 6 for more information. Photometric files available on request.			
Ex and Environmental				
Ambient temperature (Ta)	- 55°C to + 55°C			
Storage temperature	- 55°C to + 80°C			
Markings	Zone 1, 2, 21, 22			Zone 2, 21, 22
ATEX classification	CE 2804 Ex II 2G II 2D			CE 2804 Ex II 3G II 2D
IEC classification gas	Ex eb mb IIC T6 Gb	Ex eb mb IIC T5 Gb	Ex eb mb IIC T4 Gb	Ex ec mc IIC T4 Gc
IEC classification dust	Ex tb IIIC T85 Db	Ex tb IIIC T100 Db	Ex tb IIIC T135 Db	Ex tb IIIC T135 Db
Classification with alternative ambient temperature	N/A	N/A	N/A	N/A
General Specifications				
Startup time	1 second			
Weight	15,2 kg			14,8 kg
Cable glands	2xM25 10-18mm Through Gland 2xM20 Blind Cap Other glands and blind caps on request.			
IP class	IP 66/67			
Predicted lifetime L70 (70% light output) Ta 25°C	>320k hours	>320k hours	>320k hours	>320k hours
Predicted lifetime L70 (70% light output) Ta 45°C	>180k hours	>120k hours	>100k hours	>100k hours
Corrosion class	C5 m ISO 9223/12944 (for offshore and maritime environments)			

## Dimensions and Installation

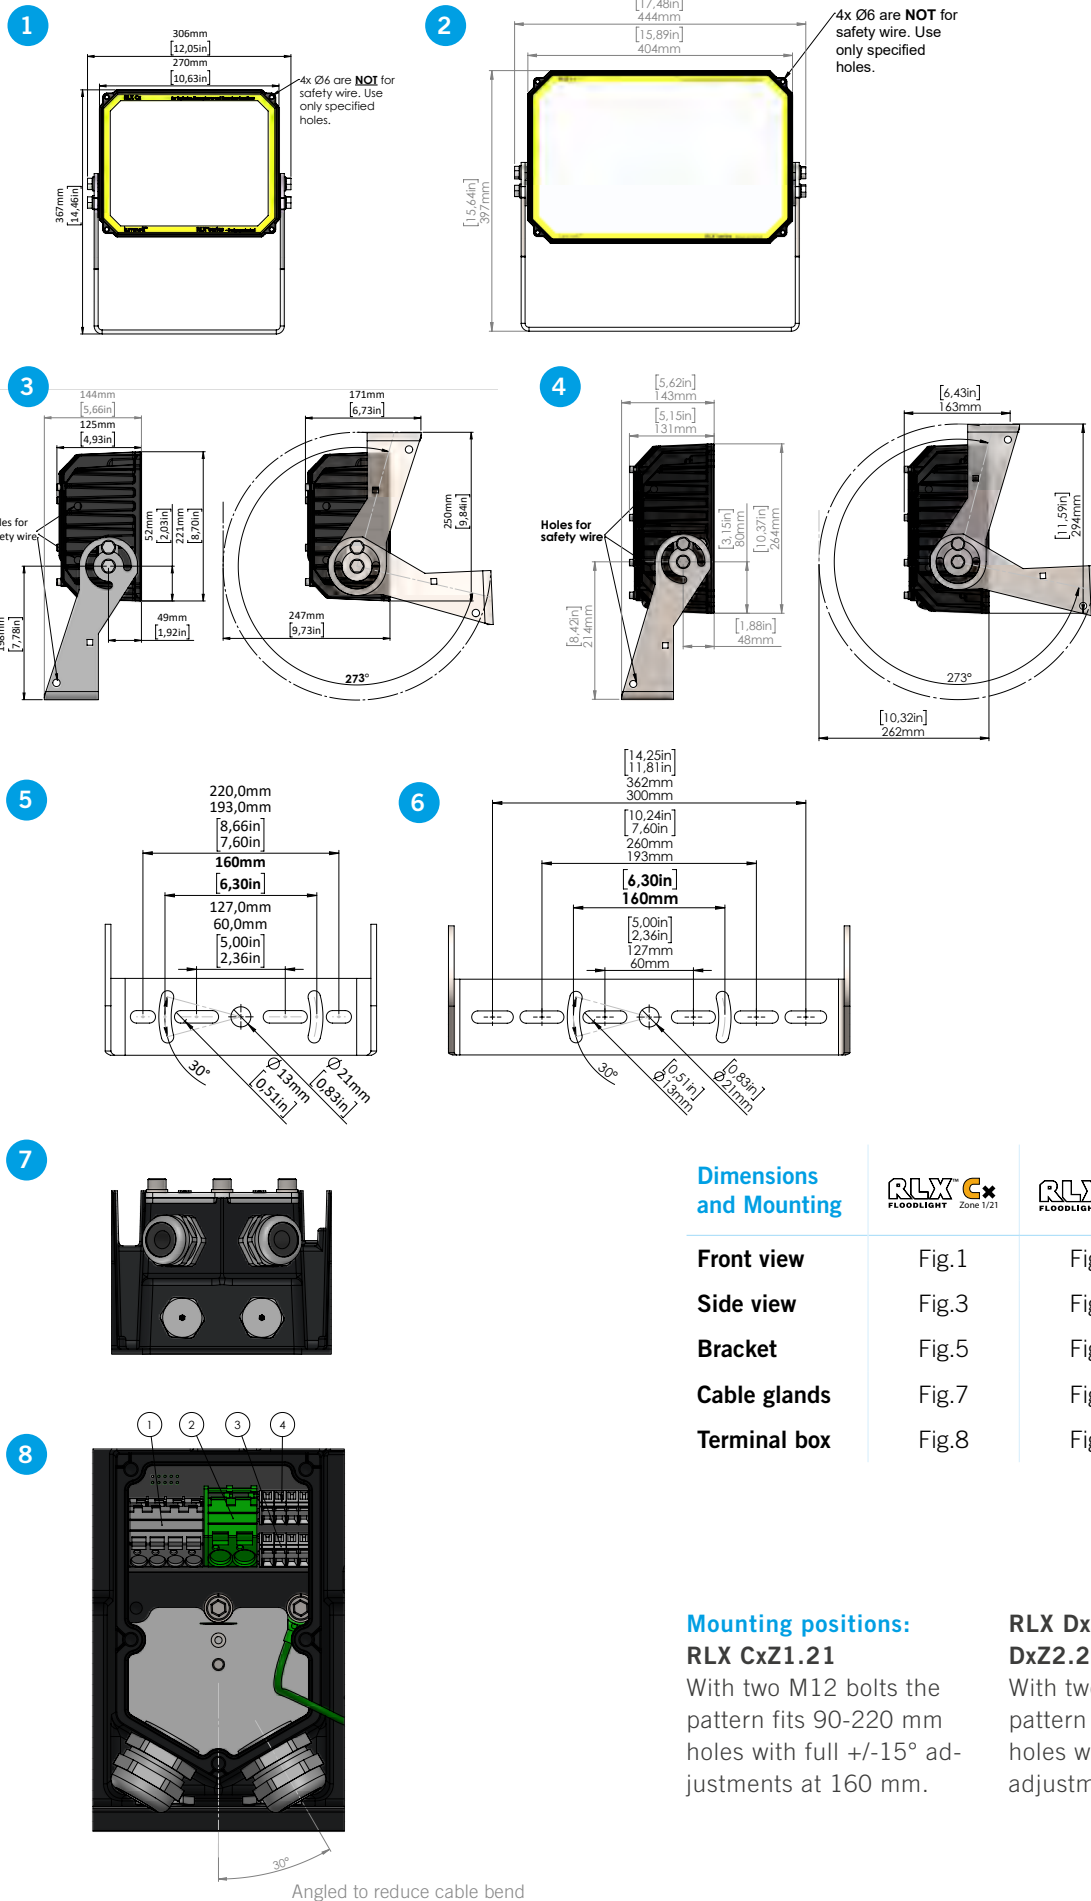

## Materials

<b>Body / casing / chassis</b>	Seawater resistant; casted, anodized and powder coated aluminium
<b>Glass</b>	Tempered glass
<b>Bracket, bolts, nuts etc.</b>	Stainless steel AISI 316L (1.4404), A4





## Approvals and Declarations

<b>Low Voltage Directive (LVD) 014/35/EU</b>	EN 62031:2008/A1:2013/A2:2015 – LED Modules for general lighting
<b>Photobiological safety</b>	EN 62471:2008 – Photobiological safety of lamps and lamp systems
<b>EMC and immunity</b>	EN 55015:2013 – Radiated and conducted emissions  EN 60945:2002 – Marine Equipment. EMC Immunity, Radiated and Conducted Emissions  MIL-STD461F CE101, CE102 and RE102 - Navy Top Deck  MIL-STD461F CE101, CE102 and RE102 - Navy Mobile & Army
<b>Explosion proof standards</b>	IEC/EN 60079-0:2018 – Equipment General Requirements  IEC/EN 60079-7:2015+A1:2018 – Equipment protection by increased safety “e”  IEC/EN 60079-18:2015+A1:2017 – Equipment protection by type of protection “m”  IEC/EN 60079-31:2014 – Equipment dust ignition protection by enclosure “t”



## Options and Accessories


- ① Pole mount bracket Ø30-Ø100
- ② Protection Guard Set
- ③ Retrofit bracket 130, 160 to 225-260, 350-380
- ④ Connection Box Gel KIT  
(Only RLX DxZ1.21 and DxZ2.21)

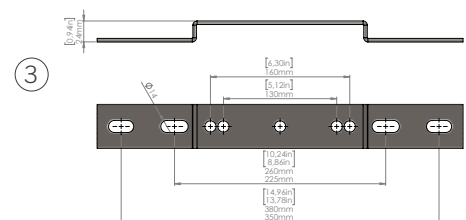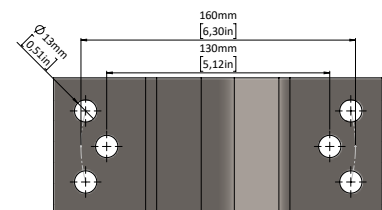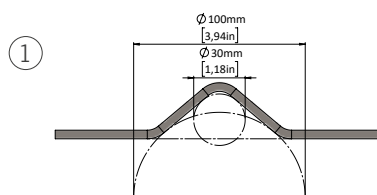



## Beam Alternatives

Beam group	Beam code	Light projection – diameter @ 10m distance	Color code
Spot beams	Spot 15	2,6 m	●
Medium beams	Medium 40	7 m	●
	Medium 60	10 m	
	Medium 60 x 40	10 x 7 m	
Wide beams	Wide 80 x 60	14 x 10,5 m	●
Oval beams	Oval 45 x 15	8 x 2,6 m	●

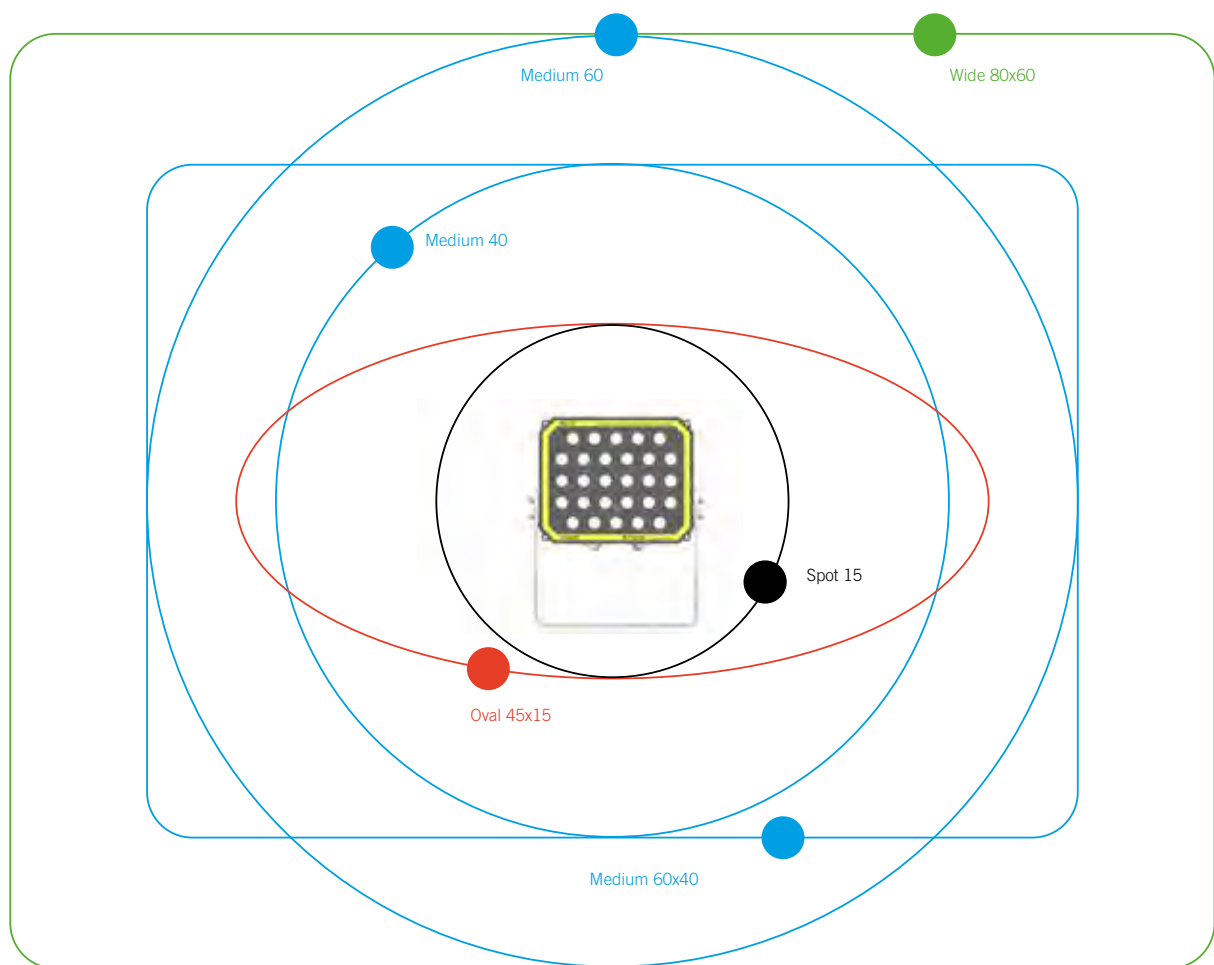



Design protected

**"This is the best bowlight I've ever seen. I see waves and objects in the water on very long distance – it's simply amazing!"**


Capt. Eldar Giske, M/S Ekspressen – Norled AS



The BLX™ Bowlight is designed to improve the ability to see during navigation and maneuvering at night. By combining the proven technology of the RLX Series with the practical testing of the optical features, Luminell has created a powerful Bowlight which will increase safety and endure, despite relentless and very harsh environments.

#### Key Features

- Detects bouy reflex on 1 NM
- Dimmable
- BLX™ design – compact, sealed and highly resistant to shock and vibrations
- Proven endurance
- Available in 24VDC and 100-277VAC
- Maintenance free
- Instant light
- Easy to clean design




Input Specifications	BLX™ C	BLX™ D
Input voltage range	22 – 30 VDC	22 – 30 VDC
Alternative voltage range	100 – 277 VAC (external PSU)	100 – 277 VAC (external PSU)
Frequency range 230VAC	50 – 60 Hz	50 – 60 Hz
Rated power	250W @ 24VDC	500W @ 24VDC
Current @ 24VDC	10,5 A	2x 10,5 A
Current @ 230VAC	1,1 A (external PSU)	2,2 A (2x 1,1A for each external PSU)
DIM	0-100% using 0-100 kΩ or 0-10VDC.	0-100% using 0-100 kΩ or 0-10VDC. Spot/ Oval can be controlled separately.
Light Specifications		
Initial luminous flux @ Ta 25°C	23.800	48.800 (23.800 + 25.000)
Beam angles	Spot 8 Oval H Combination of Spot 8 and Oval H	Spot 8 Oval H Spot 8 / Oval H
Candela	278.000 Cd	740.000 Cd (645.000 + 95.000)
Range (1 lx)	527 m	860 m
Tested range	Detects bouy reflex on 0,5 NM (926 m)	Detects bouy reflex on 1 NM (1.852 m)
Color rendering index (CRI)	70 (min.)	70 (min.)
Color temperature	5.000 - 8.000 K	5.000 - 8.000 K
Alternative color temperature	2.700 K - 3.000 K	2.700 K - 3.000 K
General Specifications		
Startup time	1 sec.	1 sec.
Operating ambient temperature (Ta)	- 40°C to + 55°C	- 40°C to + 55°C
Storage temperature	- 40°C to + 80°C	- 40°C to + 80°C
Weight (apx.)	5,6 kg	9,5 kg
Weight external PSU (apx.)	1 x 2 kg	2 x 2 kg
Cable gland	1xM20 (6-13mm)	2xM20 (6-13mm)
IP class	IP66/67	IP66/67
Lifetime housing and materials	Made to endure at least 20 years. Corrosion class C5m ISO 9223/12944 (for offshore and maritime environments) verified by 	
Lifetime LED and electronics	L70 @ >25°C ~57.900h	L70 @ >25°C ~57.900h
	At high ambient temperatures and no wind the BLX™ Temperature Protection Control will limit the light output to ensure lifetime.	
Cable lenghts	Recommended cable length between 24VDC PSU and bowlight is 15m on BLX™ C/D (250W per section). Specified lenghts is applicable with use of 2,5mm2 cross section supply cable. This is a general recommendation. It is the installer's responsibility to assess this on each installation.	

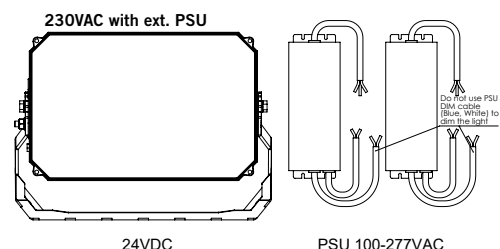



## Materials

<b>Body / casing / chassis</b>	Seawater resistant; casted, anodized and powder coated aluminium
<b>Glass</b>	Tempered glass
<b>Bracket, bolts, nuts, etc.</b>	Stainless steel AISI 316L (1.4404), A4




## Safety Standards

Description	Standard
LED modules for general lightning	EN 62031:2008/A1:2013/A2:2015
Photo biological safety of lamps and lamp systems	EN 62471:2008
EMC radiated and conducted	EN 55015:2013 and MIL-STD461F/G Navy Top Deck
EMC marine radiated and conducted (using screened cable)	EN/IES 60945:2002
ETL / cETL certified	ANSI/UL1598, ANSI/UL1598A, ANSI/UL 8750 and CSA C22.2 No.250.0


## Dimensions and Mounting

<b>Front view</b>	Fig. 1
<b>Side view</b>	Fig. 2
<b>Bracket</b>	Fig. 3
<b>Control panel</b>	Fig. 4



## Options and Accessories

- Protection grid
- Anti-Ice kit
- Control panel



## Control Panel

- Multiple bowlights can be controlled from the same panel
- Individual dimming of each section
- Master ON/OFF
- Dimmable panel light (require 24VDC/VAC)
- Select individual dimming range on spot and oval (0-100% or 10-100%)
- Potential-free contact for optional control of external equipment
- Contact sets for optional external push button

Beam illustration **BLX™**  
*Bowl Light*


Beam 8°



Beam Oval H



Beam 8° / Oval H

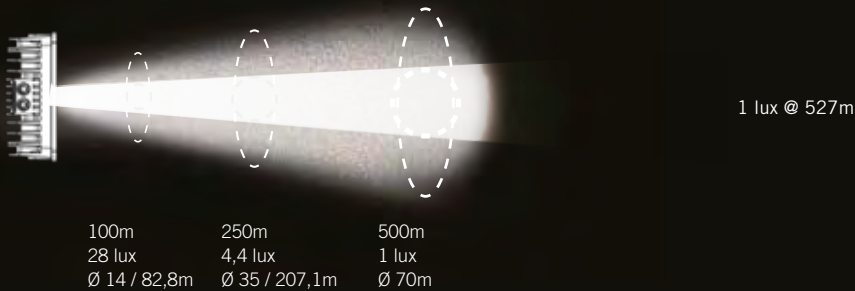

Beam illustration **BLX™D**  
*Bowl Light*


Beam 8° & 8°



Beam Oval H & OvalH



Beam 8° & Oval H

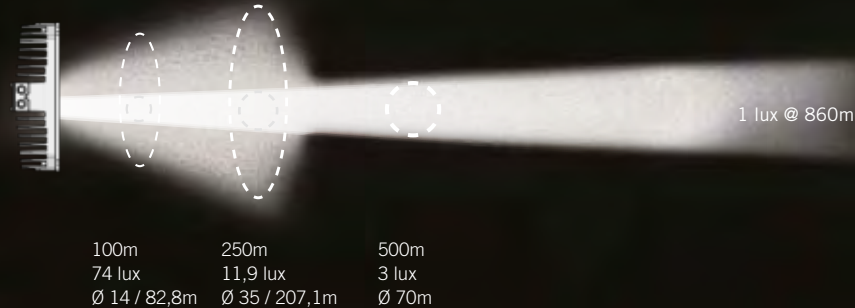





The SLX™ Searchlight module is created to push limits and maximize the potential of LED technology and optical performance.

Luminell SLX™ 220W LED Searchlight.  
Distance: 257 meters.



«This is a perfect light for us! Regarding light beam, power and range there is nothing to complain about! The light always works and it gets a lot of beating in the rough Northern-Sea, with our small vessel traveling at 30 knots.»

Asbjørn Thomassen, RS-138 (Search and rescue Vessel)



### Key Features

- Instant light
- No maintenance
- Upgrade your searchlight with different bracket kits available
- One or two different beam types per SLX™ module
- Very even light distribution
- Dimmable – perfect in snow, fog or similar conditions
- Compact, sealed and resistant to vibrations and shocks
- Available in 24VDC and 100-277VAC
- Proven endurance

The SLX™ Series LED searchlight module is made to replace conventional searchlight modules, increase light performance and eliminate costly and annoying maintenance. It is crafted to give superior value to the user with a powerful, compact and durable design, giving you the best return on investment possible.

The SLX™ searchlight module will enable you to detect an object at a distance of up to 2,600 meters away, depending on the chosen beam type for your needs.

The SLX™ is made to be mounted or fixed to suitable, existing movable platforms. Adapter bracket kits for certain movable searchlight platforms can also be delivered with your SLX™ searchlight module.

Our team are ready to take your requests and questions, so that your SLX™ searchlight can start making a real difference for you.

When safety at sea matters, Light Matters!

## Input Specifications

**Input voltage range**

**Alternative voltage rang**

**Frequency range**

**Current @ 24 VDC**

**Current @ 230 VAC**

**DIM**

## SLX™ Module

9-36 VDC


100-277 VAC (external PSU)

50-60 Hz

1,6A/3,2A

0,2A/0,4A

Not dimmable



## General Specifications

**Startup time**

**Operating ambient temperature (Ta)**

**Storage temperature**

**Weight (apx.)**

**Weight external PSU (apx.)**

**Cable gland**

**Blind caps**

**IP class**

**Lifetime prediction (L70) @ Ta 25° C**

**Corrosion class**

1 sec.

-40°C to +55°C

-40°C to +80°C

1,2kg

1x1kg or 1x2kg


Fixed and moulded 3m 2x1,5 cable

None

IP66/67

75.000 hrs








C5m ISO 9223/12944 (for offshore and maritime environments)



3,5° beam or 15° beam


Product	SLX B 40WDC1 5K	SLX B 80WDC1 5K
<b>Model no.</b> <b>Light beam angle</b> <b>Total intensity Cd</b> <b>Range (1 lux/0,25 lux)</b> <b>Color rendering (CRI)</b> <b>Color temperature (CCT)</b> <b>Power</b> <b>Optional AC PSU Acc.</b> <b>Comments:</b>	L0525-1 3.5° 400kCd 630m / 1265m 70 (min.) 5000-6000K 40W 1xS0093 (max 2 SLX B/PSU) 1xS0117 (max 3 SLX B/PSU)	L0525-2 15° 80kcd 280m / 565m 70 (min.) 5000-6000K 80W 1xS0093 (max 2 SLX B/PSU) 1xS0117 (max 3 SLX B/PSU)
	1x power input 1x PSU is needed for AC installations If the SLX is powered using an external VAC power supply the used power will increase by approx. 10%.	

## Multiple mounting options for optional bracket

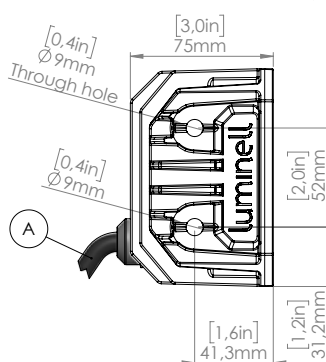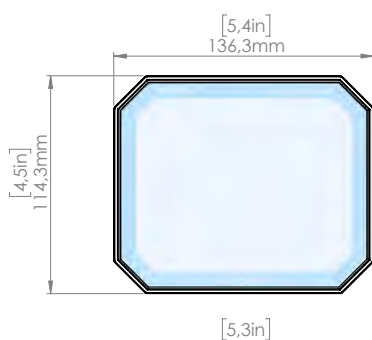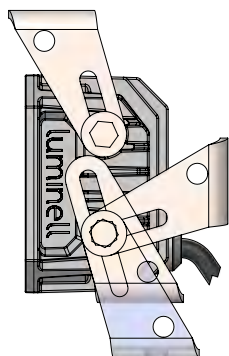

Supplied with 3m 2x1,5mm<sup>2</sup> permanently fixed cable.

OPTINAL BRACKET: 1002613 L0570 B MARINE BRACKET SET	
Component:	Qty.
L0489 RLX B Bracket	1
S0023 M8x25 DIN 933 ISO 4017 A4 Hex Cap Screw	2
S0043 M8 DIN 985 ISO 7040 A4 Lock nut wNylon	2
insert S0185 8,4 DIN 9021 ISO 7093 A4 Flat washer	4

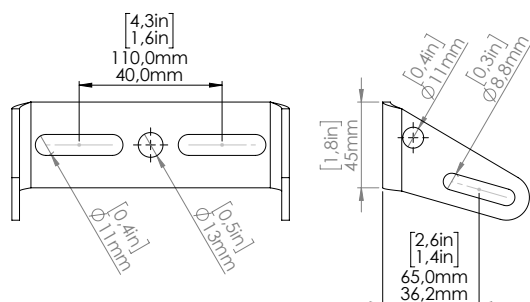



## Input Specifications

**Input voltage range**

**Alternative voltage range**

**Frequency range**

**Current @ 24 VDC**

**Current @ 230 VAC**

**DIM**

## SLX™ Module

22 – 30 VDC


100 – 277 VAC (external PSU)

50 – 60 Hz

< 6,25 A

< 0,7 A

0-100 kΩ or 0-10VDC

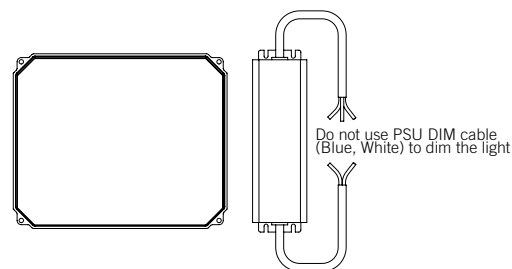

## General Specifications

**Startup time**

**Operating ambient temperature (Ta)**

**Storage temperature**

**Weight (apx.)**

**Weight external PSU (apx.)**

**Cable gland**

**Blind caps**

**IP class**

**Lifetime prediction (L70) @ Ta 25° C**

**Corrosion class**

**Cable lengths**

1 sec.

- 40°C to + 55°C

- 40°C to + 80°C

5 kg

1 x 1 kg

2xM20 (6-13mm)

None

IP66/67

75.000 hrs

C5m ISO 9223/12944 (for offshore and maritime environments)

Recommended cable length between 24VDC PSU and SLX™ C is 20m (150W per section). Specified lengths are applicable with use of 2,5mm<sup>2</sup> cross section supply cable. This is a general recommendation. It is the installer's responsibility to assess this on each installation.



4° beam or 6+° beam

Product	SLX™ C 24V 4	SLX™ C 24V 6
<b>Model no.</b>	L0210-1	L0210-2
<b>Light beam angle</b>	4°	6+°
<b>Total intensity Cd</b>	875 000 Cd	875 000 Cd
<b>Range (1 lux/0,25 lux)</b>	935m / 1870m	935m / 1870m
<b>Color rendering (CRI)</b>	70 (min.)	70 (min.)
<b>Color temperature (CCT)</b>	5000-8000 Kelvin	5000-8000 Kelvin
<b>Power</b>	105 W	150 W
<b>Optional AC PSU Acc.</b>	1x S0093	1x S093
<b>Comments:</b>	- 1x power input - 1x PSU is needed for AC installations - If the SLX™ is powered using an external VAC power supply the used power will increase by approx. 10%.	

## Input Specifications

**Input voltage range**

**Alternative voltage range**

**Frequency range**

**Current @ 24 VDC**

**Current @ 230 VAC**

**DIM**

## SLX™ Module

22 – 30 VDC


100 – 277 VAC (external PSU)

50 – 60 Hz

< 10,7 A

< 1,1 A

0-100 kΩ or 0-10VDC

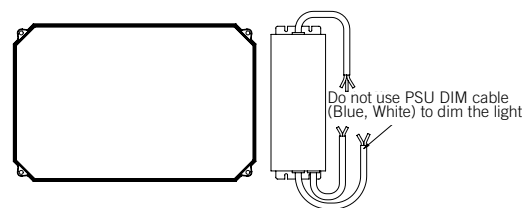

## General Specifications

**Startup time**

**Operating ambient temperature (Ta)**

**Storage temperature**

**Weight (apx.)**

**Weight external PSU (apx.)**

**Cable gland**

**Blind caps**

**IP class**

**Lifetime prediction (L70) @ Ta 25° C**

**Corrosion class**

**Cable lengths**

1 sec.

- 40°C to + 55°C

- 40°C to + 80°C

8 kg

1 x 2 kg

2xM20 (6-13mm)


None

IP66/67

75.000 hrs

C5m ISO 9223/12944 (for offshore and maritime environments)

Recommended cable length between 24VDC PSU and SLX™ D is 15m (255W per section). Specified lengths are applicable with use of 2,5mm<sup>2</sup> cross section supply cable. This is a general recommendation. It is the installer's responsibility to assess this on each installation.

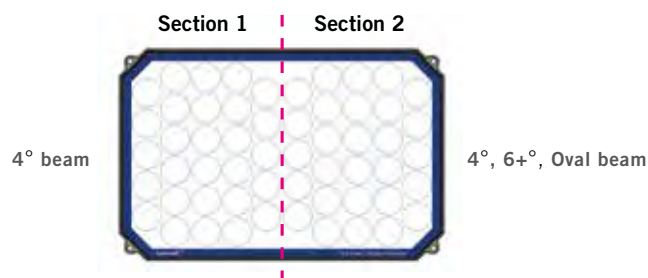

Product	SLX™ D 24V 4/4	SLX™ D 24V 4/6	SLX™ D 24V 4/Oval
<b>Model no.</b>	L0084-1	L0084-2	L0084-3
<b>Light beam angle (Section 1/2)</b>	4°/4°	4°/6+°	4°/Oval H
<b>Total intensity Cd</b>	1,75 mCd	1,75 mCd	0,950 mCd
<b>Range (1 lux/0,25 lux)</b>	1322m / 2645m	1322m / 2645m	975m / 1950m
<b>Color rendering (CRI)</b>	70 (min.)	70 (min.)	70 (min.)
<b>Color temperature (CCT)</b>	5000-8000 Kelvin	5000-8000 Kelvin	5000-8000 Kelvin
<b>Power</b>	210 W	255 W	255 W
<b>Optional AC PSU Acc.</b>	1x S0117	1x S0117	1x S0117
<b>Comments:</b>	- 2x sections linked together - 1x power input - 1x PSU is needed for AC installations		
	- 2x sections, each controlled separately. - 1x power input - 1x PSUs is need for AC installations - Control panel is highly recommended!  - If the SLX™ is powered using an external VAC power supply the used power will increase by approx. 10%.		

## Materials

<b>Body / casing / chassis</b>	Seawater resistant; casted, anodized and powder coated aluminium
<b>Glass</b>	Tempered glass
<b>Bracket, bolts, nuts, etc.</b>	Stainless steel AISI 316L (1.4404), A4

## Standards for SLX™ Searchlight

Description	Standard
LED modules for general lightning	EN 62031:2008/A1:2013/A2:2015
Photo biological safety of lamps and lamp systems	EN 62471:2008
EMC radiated and conducted	EN 55015:2013 and MIL-STD461F/G Navy Top Deck
EMC marine radiated and conducted (using screened cable)	EN/IEC 60945:2002
ETL / cETL certified	ANSI/UL1598, ANSI/UL1598A, ANSI/UL 8750 and CSA C22.2 No.250.0 (not SLX B)

## Dimensions and Mounting

Front view

Side view




Side view up-close

## SLX™ Searchlight (fixed)

Fig. 1

Fig. 2

Fig. 3

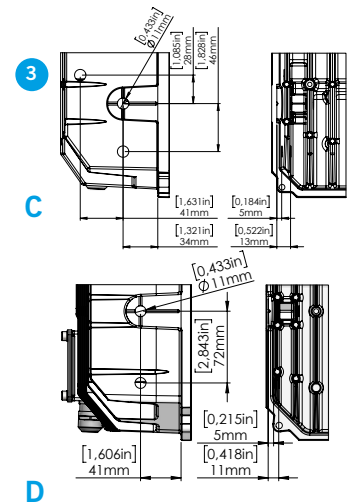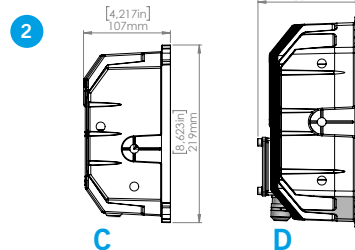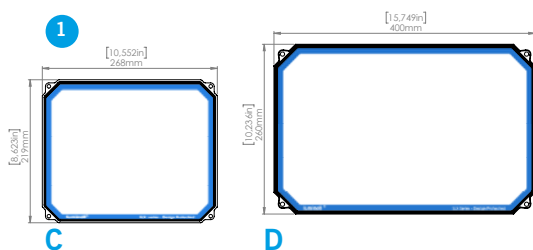

## Bracket Options SLX™ D

L0413 Marine Bracket

L0378 Adapter Bracket D Type 1.

L0379 Adapter Bracket D Type 2.

L0412 C Marine Bracket Set

L0570 B Marine bracket set

## Compatible with

SLX D

«Seematz» 351


«Norselight» SH 260-470, B-BH

SLX C

SLX B

Fig. 4

Fig. 5



Control panel

## Options and Accessories

- Control panel
- Protection grid
- Anti-ice kit

## Control Panel

- Multiple searchlights can be controlled from the same panel
- Individual dimming of beams
- Master ON/OFF
- Dimmable panel light (require 24VDC/VAC)
- Select individual dimming range on beams (0-100% or 10-100%)
- Potential free contact, for optional control of external equipment
- Contact sets for optional external push button

Beam 3.5°




250m  
6,4 lux  
Ø 15,3m



500m  
1,6 lux  
Ø 30,6m

1lux@632m

Beam 15°



250m  
1,3 lux  
Ø 15m

1 lux@283m

Beam 4°



250m  
14 lux  
Ø 17m



500m  
4 lux  
Ø 35m



1000m  
0,9 lux  
Ø 70m

1lux@935m

Beam 6+°



250m  
14 lux  
Ø 17m / 26m



500m  
4 lux  
Ø 35m / 52m



1000m  
0,9 lux  
Ø 70m / 104m

1lux@935m

Beam 4°/4°



250m  
28 lux  
Ø 17m



500m  
7 lux  
Ø 35m



1000m  
2 lux  
Ø 70m

1lux@1323m

Beam 4°/6+°



250m  
28 lux  
Ø 17m / 26m



500m  
7 lux  
Ø 35m / 52m



1000m  
2 lux  
Ø 70m / 104m

1lux@1323m

Beam 4°/Oval



250m  
16 lux  
Ø 17m  
Oval: 250x45m



500m  
4 lux  
Ø 35m



1000m  
1 lux  
Ø 70m

1lux@1000m





**Luminell SLX™ 220W LED searchlight**

..... **COMPARISON** .....

**Traditional 500W halogen searchlight**









## SL1 – LED searchlight Compact & Powerful

- Compact size
- Progressive design
- Light weight
- Excellent EMC characteristics
- Ruggedized construction
- Unlimited horizontal movement

- Wave compensated tilt movement
- New user friendly operator panel logic
- Digital controlled spot and flood beam
- Over 2.0 MCd light intensity with LED
- Dimmable beam
- Hold light direction (HLD) function



**SL1**  
SEARCHLIGHT



# SL1 – Searchlight

## Output / performance

<b>Spot beam</b>	3.5°/ 1 800 kCd / 1340 m
<b>Wide beam</b>	15 °/ 420 kCd / 12 000 lm
<b>Initial luminous flux</b>	Over 30 000 lm
<b>CRI</b>	Min. 70
<b>Color temp</b>	6000

## Input

<b>Mains power searchlight</b>	24 VDC, power consumption max 550W (for AC mains power, a separate AC/DC converter is needed)
<b>Mains power operator panel</b>	18 – 32 VDC

## Pan/Tilt


<b>Horizontal</b>	Adaptive progressive control wheel Unlimited movement with slipping technology Horizontal movement max speed 33°/second
<b>Vertical</b>	Proportional progressive joystick + 90°/ - 30 movement Vertical movement max speed 68°/second Wave compensation function – activate/deactivation*

## Functions

<b>Direct button functions</b>	Horizontal and vertical movement Light on/off Wave compensation on/off* Hold light direction on/off* Beam angle spot/flood Dimming step by step
<b>Standard menu functions</b>	Custom home screen – set your 4 most used functions Up to 4 programmable fixed positions Sweep in horizontal direction Surveillance in horizontal and vertical direction Switch – to another potential SL1 in the network Sync – advanced smarter sync with offset setting possibility

\*Features are available soon by free upgrade.

## Illumination presentation

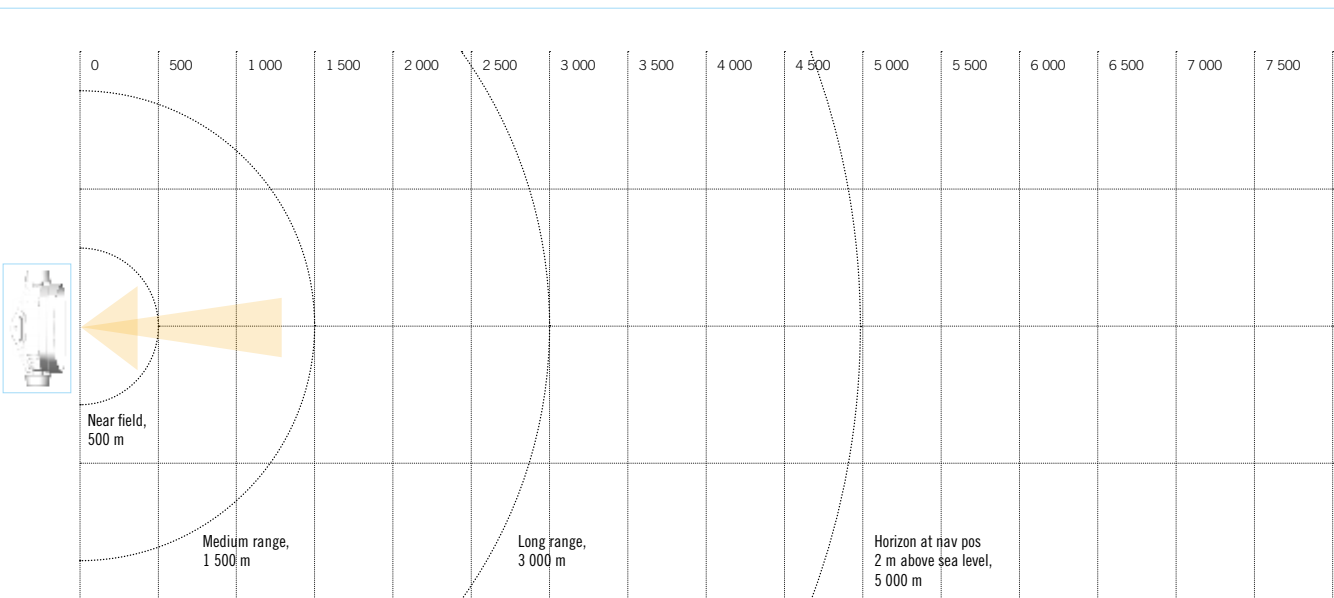


## SL1 – Searchlight



### General specification

<b>IP class</b>	Searchlight IP66 Operator panel IP56
<b>Operating temperature</b>	Searchlight -40°C to +55°C* Operator panel -20°C to +55°C
<b>EMC</b>	Designed for IEC 60945
<b>Vibration/shock</b>	Designed for IEC 60945
<b>Materials</b>	<ul style="list-style-type: none"> <li>- Searchlight body in seawater resistance aluminum, anodized and powder coated.</li> <li>- Searchlight mechanical hub in acidproof stainless steel.</li> <li>- Tempered front glass.</li> <li>- Operator panel made in PC-ABS.</li> </ul>
<b>Colours</b>	<ul style="list-style-type: none"> <li>- The searchlight body comes in 3 colour versions:</li> <li>- White RAL 9016 gloss level 70</li> <li>- Matt Jet Black RAL 9005 gloss level 20</li> <li>- Matt Light grey RAL 7035 gloss level 20</li> </ul>
<b>Electrical interface to vessel</b>	<ul style="list-style-type: none"> <li>- DC power 3 wires (+/-/earth)</li> <li>- Ethernet for operator control panel</li> </ul>
<b>Mechanical interface to vessel</b>	4 x threaded rod M8 in the searchlight mechanical hub. Sealing between vessel and searchlight mechanical hub for galvanic insulation (and to avoid water ingress in wheelhouse).
<b>Static size and weight</b>	19 x 40 x 42 cm, 18 kg
<b>Optional hardware</b>	<ul style="list-style-type: none"> <li>- Side entry connection adaptor (Q3 2019)</li> <li>- Stray light reduction shield (Q3 2019)</li> <li>- Integration Unity Hub (Q3 2019)</li> </ul>

\*Temperature monitored LED for increased lifetime. Reduced light effect at higher environmental temperatures

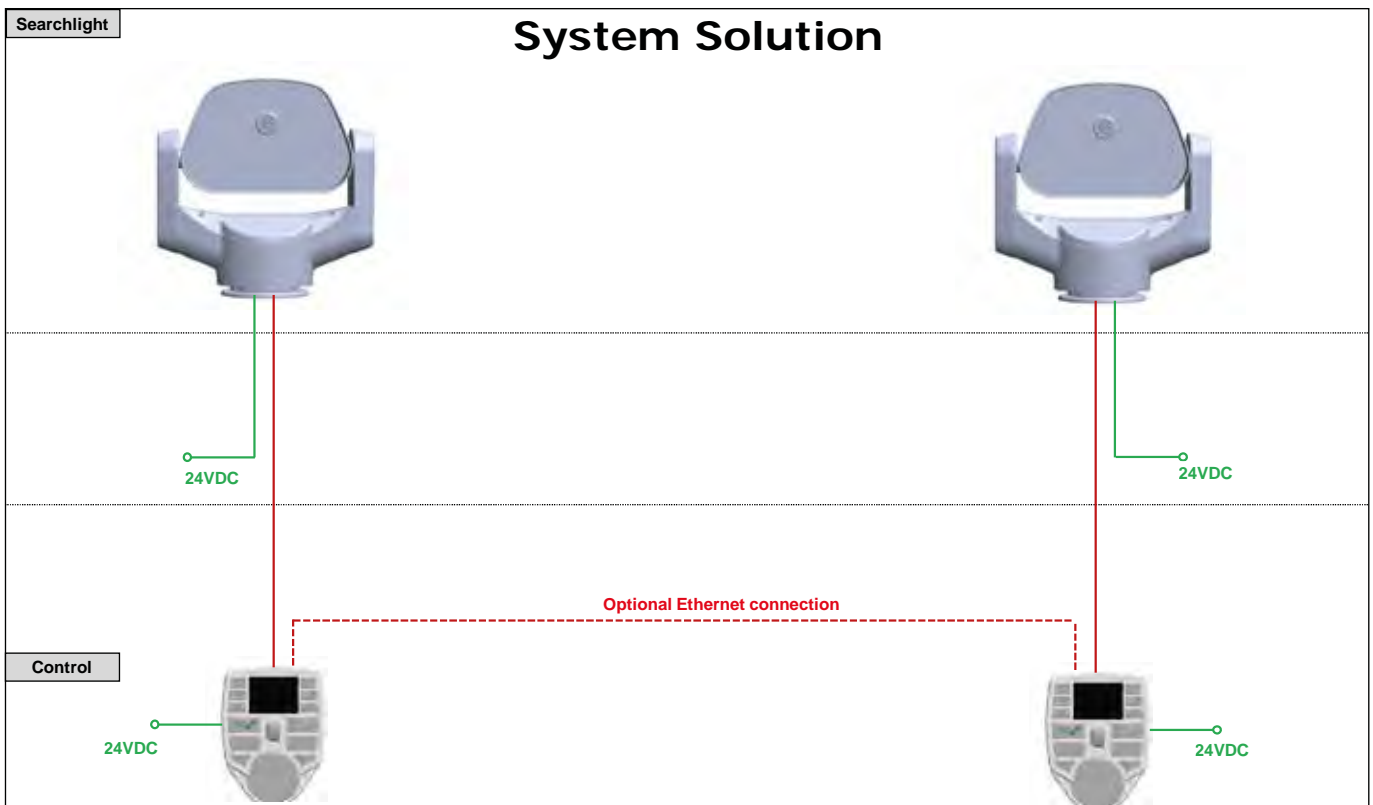

## SL1 – Searchlight

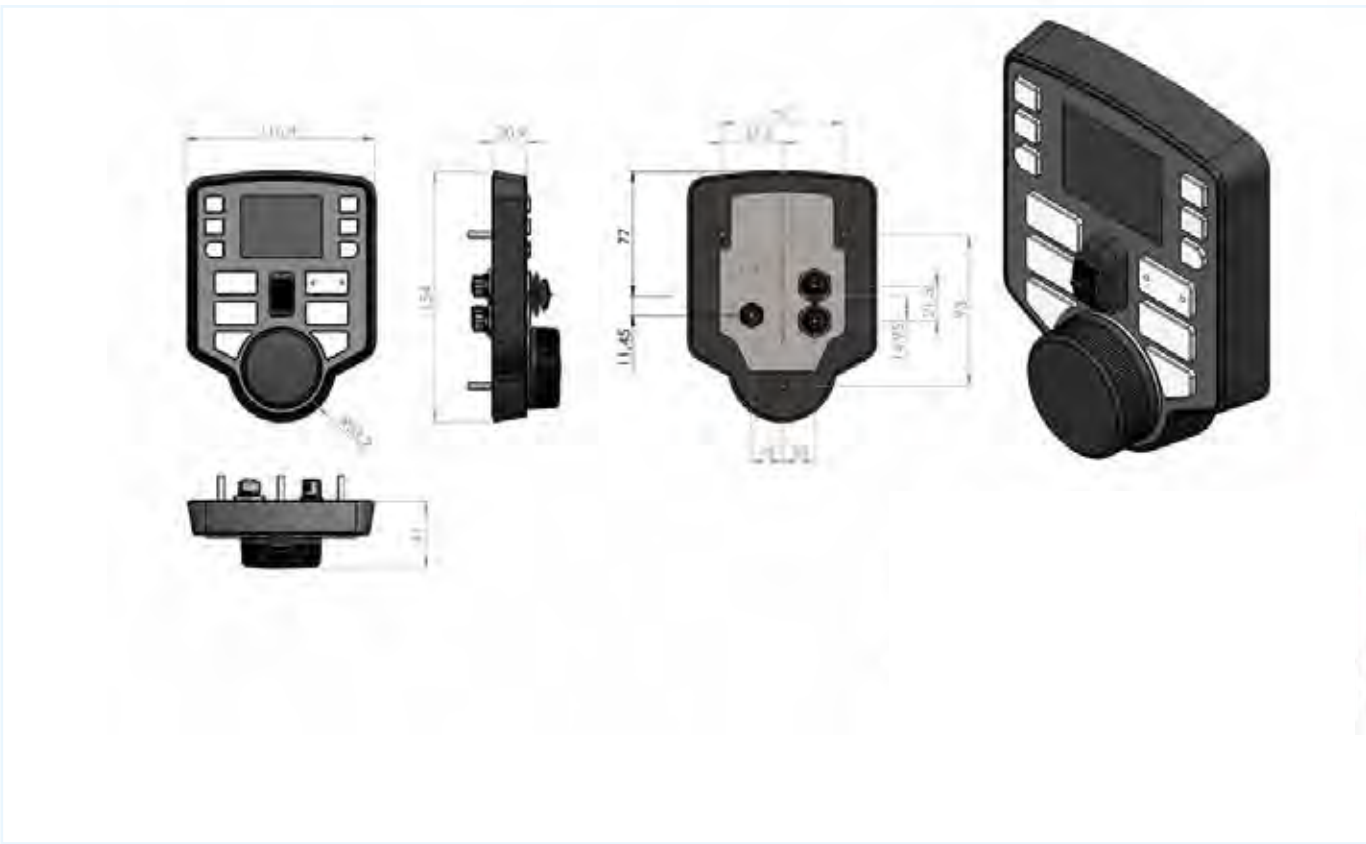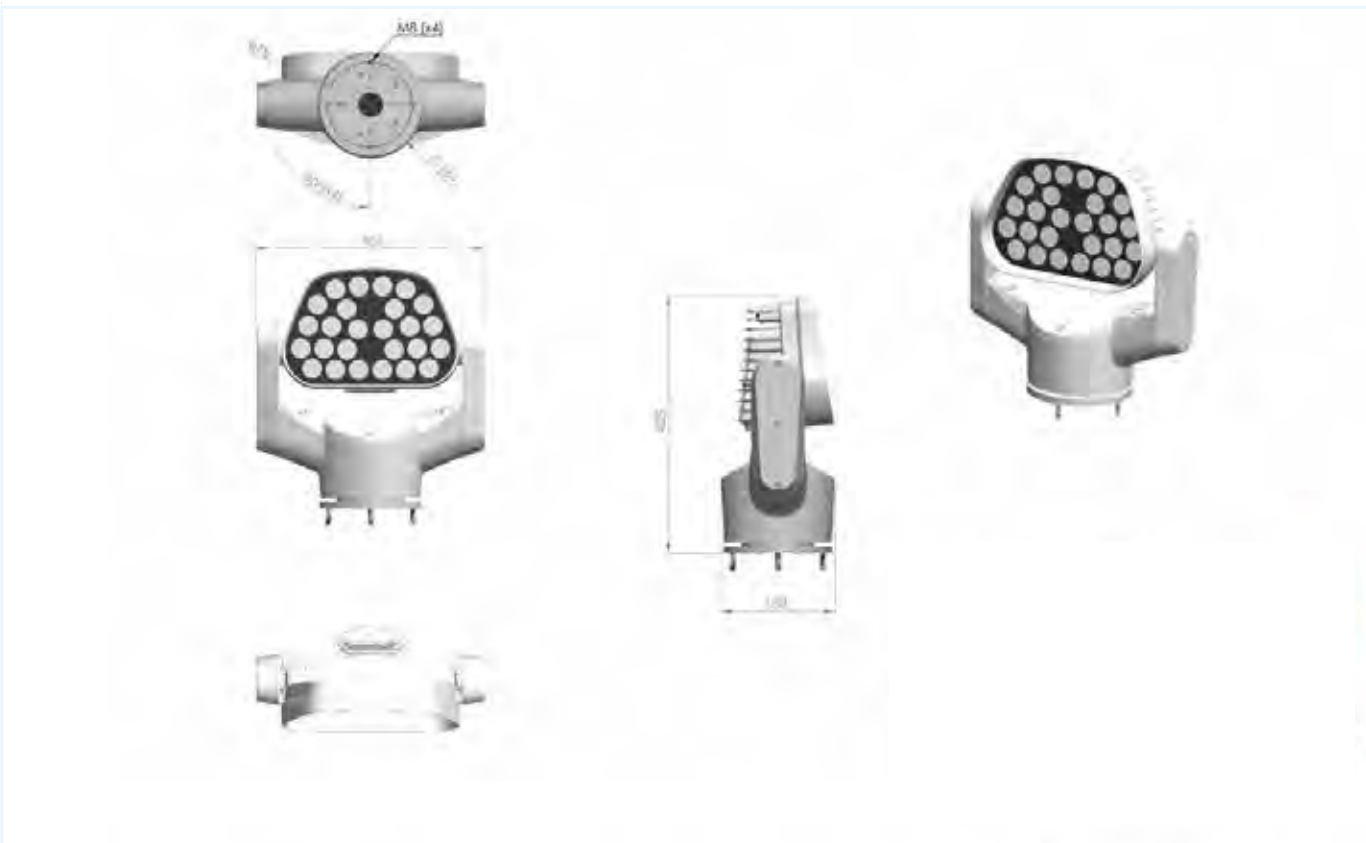

## SL2 – LED searchlight Compact & Powerful

- Compact size
- Progressive design
- FiFi regulation compliance
- Excellent EMC characteristics
- Ruggedized construction
- Unlimited horizontal and vertical movement
- User friendly operator panel logic
- Powerful spotbeam for range
- Massive wide beam for near vessel operations
- Over 4.0 MCd total light intensity
- Optional integration and automation functions



**SL2**  
SEARCHLIGHT



## SL2 – Searchlight

### Output / performance

<b>Spot beam</b>	3.5° / 3 600 kCd / 1 900 m
<b>Wide beam</b>	15 ° / 840 kCd / 24 000 lm
<b>Initial luminous flux</b>	Over 60 000 lm
<b>CRI</b>	Min. 70
<b>Color temp</b>	6000

### Input

<b>Mains power searchlight</b>	24 VDC to electrical cabinet. Power consumption max 800 W (for AC mains power, an alternative electrical cabinet is available)
<b>Mains power operator panel</b>	9 – 28 VDC


### Pan/Tilt

<b>Both axis</b>	Proportional progressive joystick Unlimited movement in horizontal and vertical direction with slipping technology Movement max speed 33°/second
------------------	--

### Functions

<b>Direct button functions</b>	Horizontal and vertical movement Light on/off Beam angle spot/flood Dimming step by step
<b>Standard menu functions</b>	Up to 4 programmable fixed positions Sweep in horizontal direction Surveillance in horizontal and vertical direction Switch – to another searchlight in the network Synchronized control

### Illumination presentation

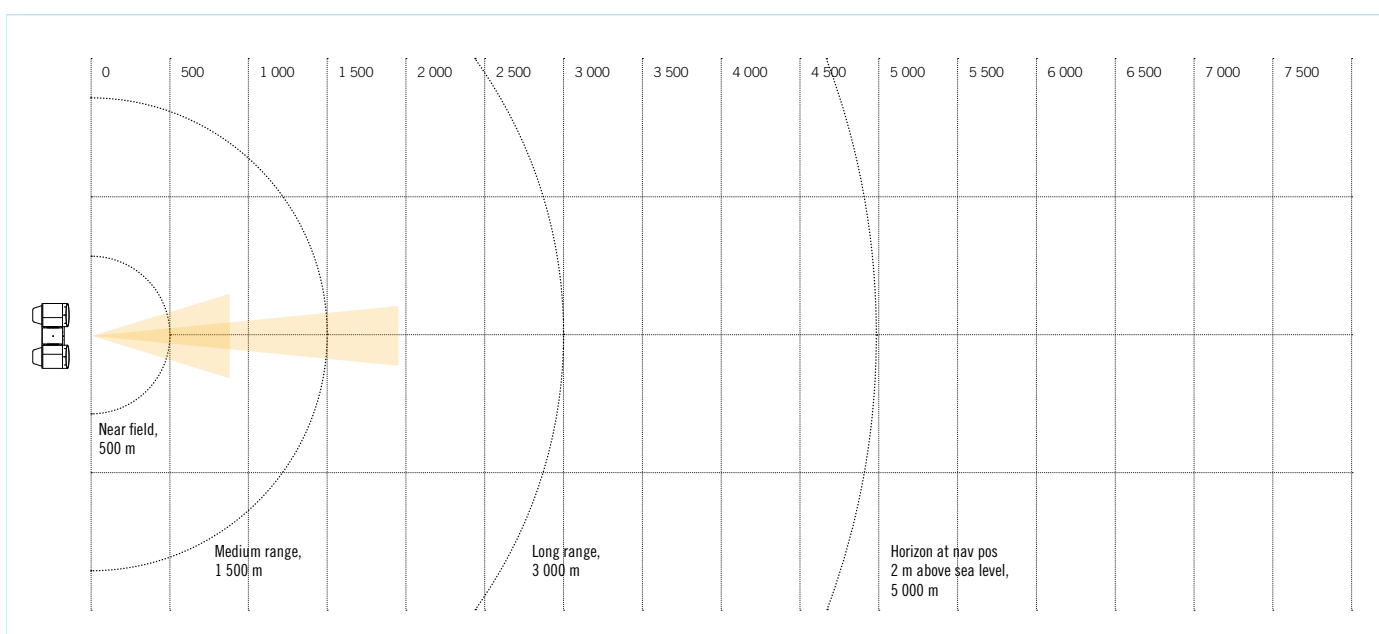


## SL2 – Searchlight



### General specification

<b>IP class</b>	Searchlight IP66 Operator panel IP56
<b>Operating temperature</b>	Searchlight -40°C to +55°C* Operator panel -20°C to +55°C
<b>EMC</b>	Designed for IEC 60945
<b>Vibration/shock</b>	Designed for IEC 60945
<b>Materials</b>	<ul style="list-style-type: none"> <li>- Searchlight body in acidproof stainless steel 1.4404, powder coated.</li> <li>- LED-module in seawater resistant aluminum, powder coated white.</li> <li>- Tempered front glass.</li> <li>- Operator panel made in ABS and anodized aluminum</li> </ul>
<b>Colours</b>	<ul style="list-style-type: none"> <li>- The searchlight comes in 3 optional colours:</li> <li>- White RAL 9016 gloss level 70</li> <li>- Matt Jet Black RAL 9005 gloss level 20</li> <li>- Matt Light grey RAL 7035 gloss level 20</li> </ul>
<b>Electrical interface to vessel</b>	<ul style="list-style-type: none"> <li>- DC or AC power cable as electrical block schematic.</li> <li>- Ethernet for operator control panel</li> </ul>
<b>Mechanical interface to vessel</b>	4 x M10 bolts in the searchlight mechanical foot. Vibration dampers for protection and galvanic insulation.
<b>Static size and weight</b>	26x65x50 cm, weight 28 kg (excluding cabinet and operator panel) (see also drawing)

\*Temperature monitored LED for increased lifetime. Reduced light effect at higher environmental temperatures

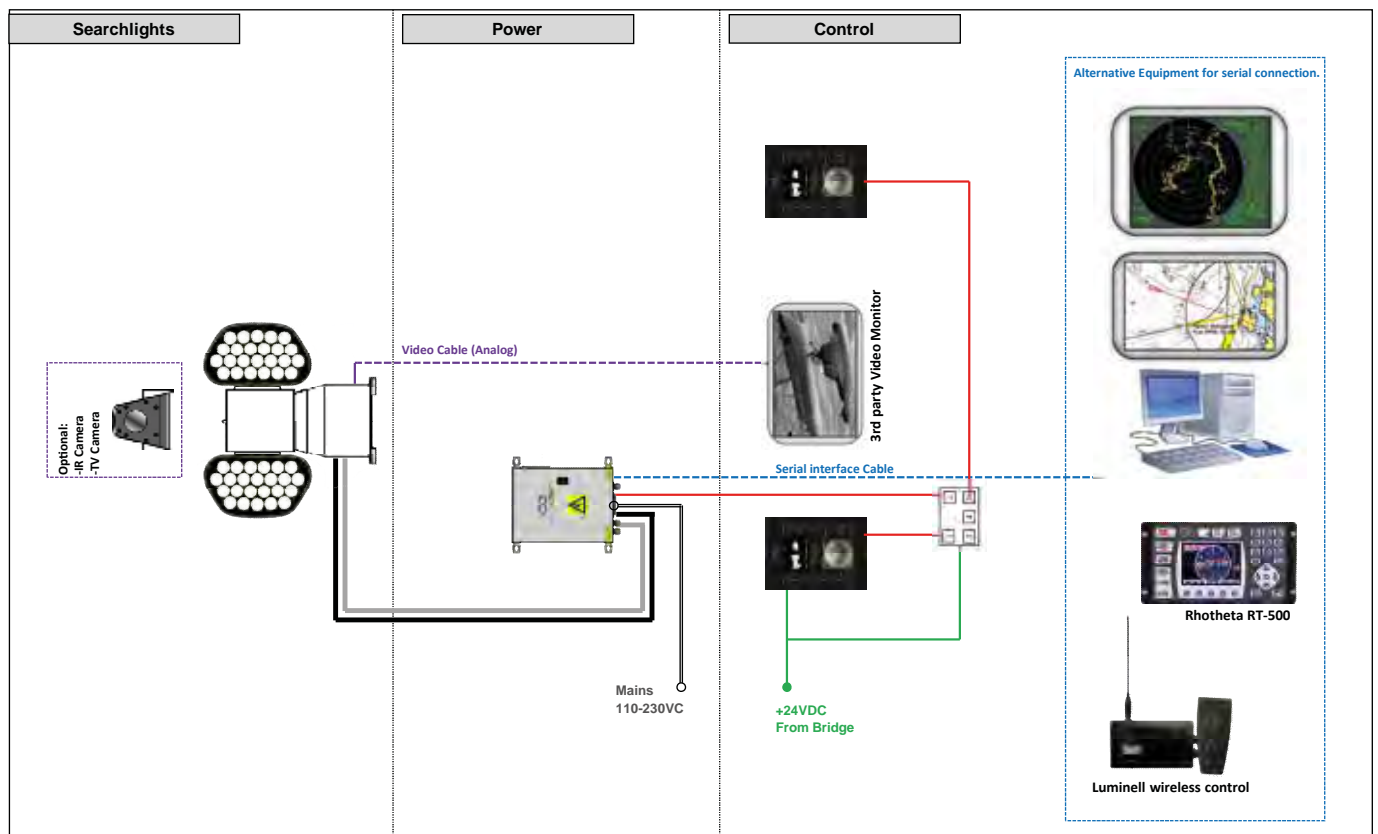

## SL2 – Searchlight

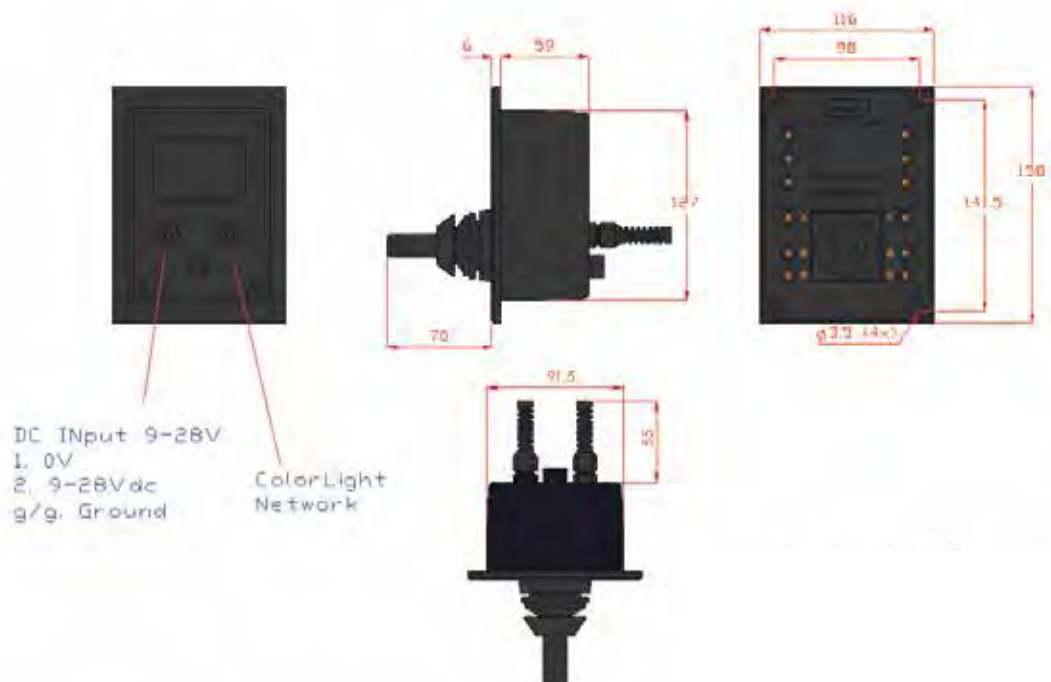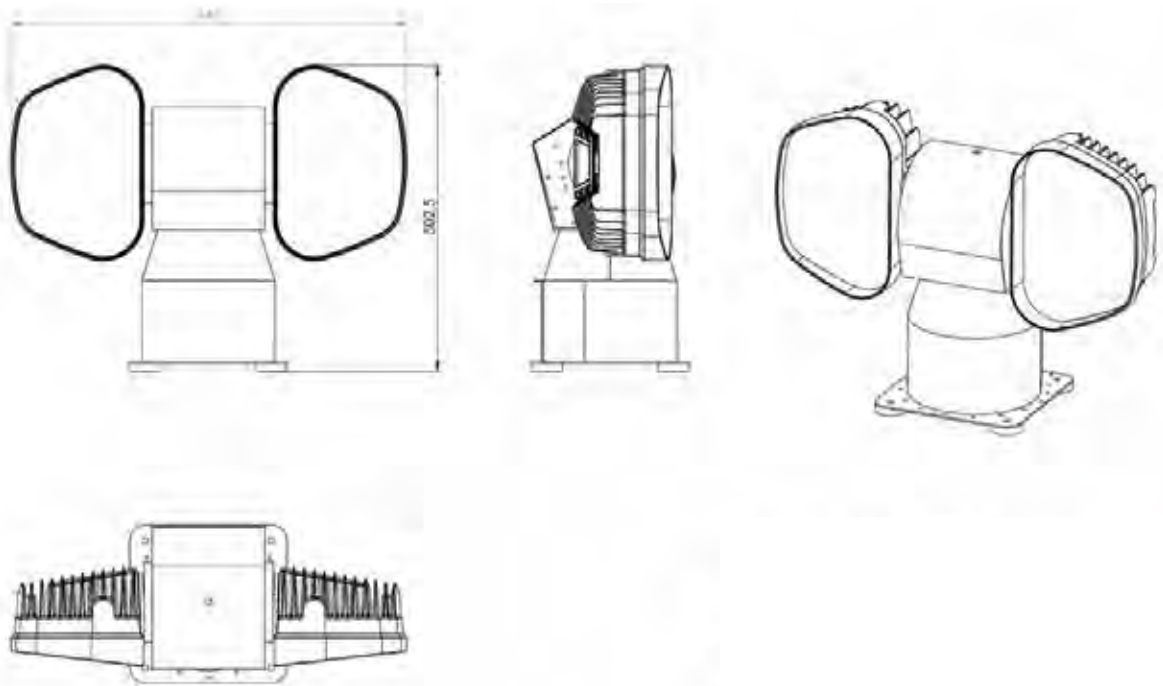

## SL2IR – LED searchlight with integrated thermal imager

- Compact size
- Progressive design
- FiFi regulation compliance
- Excellent EMC characteristics
- Ruggedized construction
- Unlimited horizontal and vertical movement
- User friendly operator panel logic
- Powerful spotbeam for range
- Massive wide beam for near vessel operations
- Over 4.0 MCd total light intensity
- Optional integration and automation functions
- Ruggedized built in thermal imager



\* IR cam 2 year



**SL2IR**  
SEARCHLIGHT



## SL2IR – Searchlight

### Output / performance

Spot beam	3.5° / 3 600 kCd / 1 900 m
Wide beam	15 ° / 840 kCd / 24 000 lm
Initial luminous flux	Over 60 000 lm
CRI	Min. 70
Color temp	6000

### Input

Mains power searchlight	24 VDC to electrical cabinet. Power consumption max 800 W (for AC mains power, an alternative electrical cabinet is available)
Mains power operator panel	9 – 28 VDC


### Pan/Tilt

Both axis	Proportional progressive joystick Unlimited movement in horizontal and vertical direction with slipping technology Movement max speed 33°/second
-----------	--

### Functions

Direct button functions	Horizontal and vertical movement Light on/off Beam angle spot/flood Dimming step by step
Standard menu functions	Up to 4 programmable fixed positions Sweep in horizontal direction Surveillance in horizontal and vertical direction Switch – to another searchlight in the network Synchronized control

### Illumination presentation

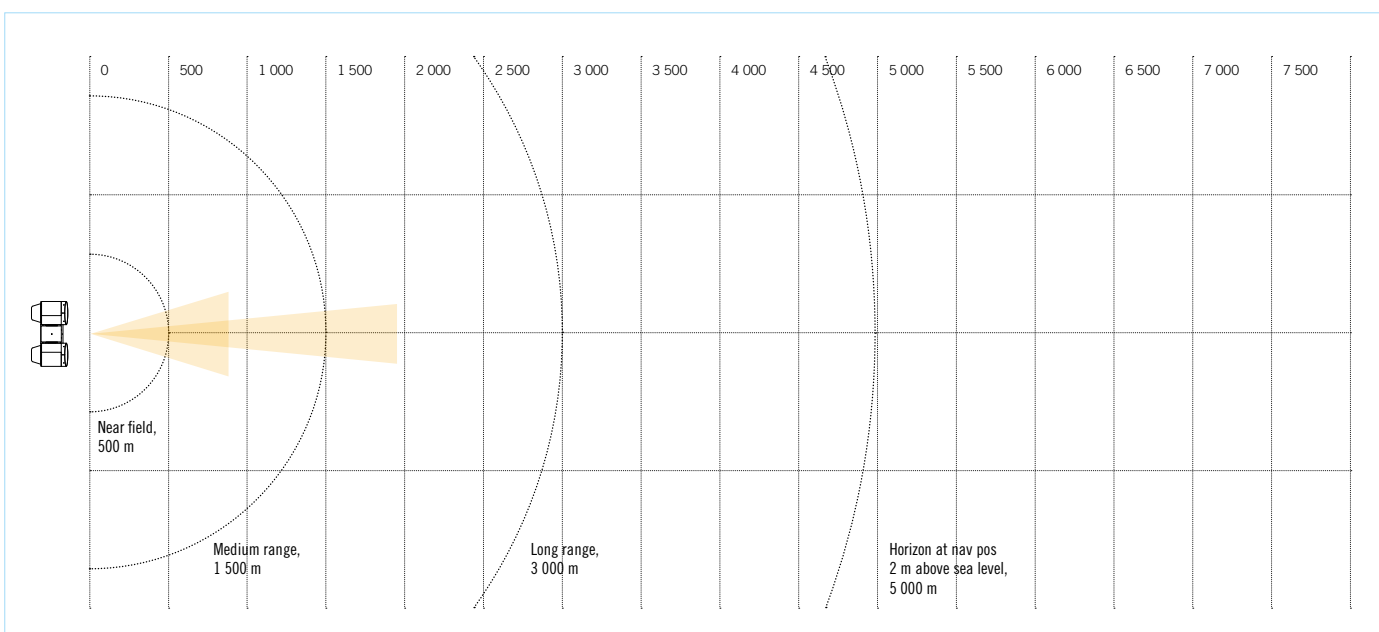

### Performance of thermal imager


IR STD 336 RES	FOW 13 x 10°	800 m Detection man, 2 000 m Detection small vessel
IR STD 640 RES	FOW 25 x 20°	900 m Detection man, 2 800 m Detection small vessel

# SL2IR – Searchlight



## General specification

<b>IP class</b>	Searchlight IP66 Operator panel IP56
<b>Operating temperature</b>	Searchlight -40°C to +55°C* Operator panel -20°C to +55°C
<b>EMC</b>	Designed for IEC 60945
<b>Vibration/shock</b>	Designed for IEC 60945
<b>Materials</b>	<ul style="list-style-type: none"> <li>- Searchlight body in acidproof stainless steel 1.4404, powder coated.</li> <li>- LED-module in seawater resistant aluminum, powder coated white.</li> <li>- Tempered front glass.</li> <li>- Operator panel made in ABS and anodized aluminum</li> </ul>
<b>Colours</b>	<ul style="list-style-type: none"> <li>- The searchlight comes in 3 optional colours:</li> <li>- White RAL 9016 gloss level 70</li> <li>- Matt Jet Black RAL 9005 gloss level 20</li> <li>- Matt Light grey RAL 7035 gloss level 20</li> </ul>
<b>Electrical interface to vessel</b>	<ul style="list-style-type: none"> <li>- DC or AC power cable as electrical block schematic.</li> <li>- Ethernet for operator control panel</li> </ul>
<b>Mechanical interface to vessel</b>	4 x M10 bolts in the searchlight mechanical foot. Vibration dampers for protection and galvanic insulation.
<b>Static size and weight</b>	26x65x50 cm, weight 28 kg (excluding cabinet and operator panel) (see also drawing)

\*Temperature monitored LED for increased lifetime. Reduced light effect at higher environmental temperatures

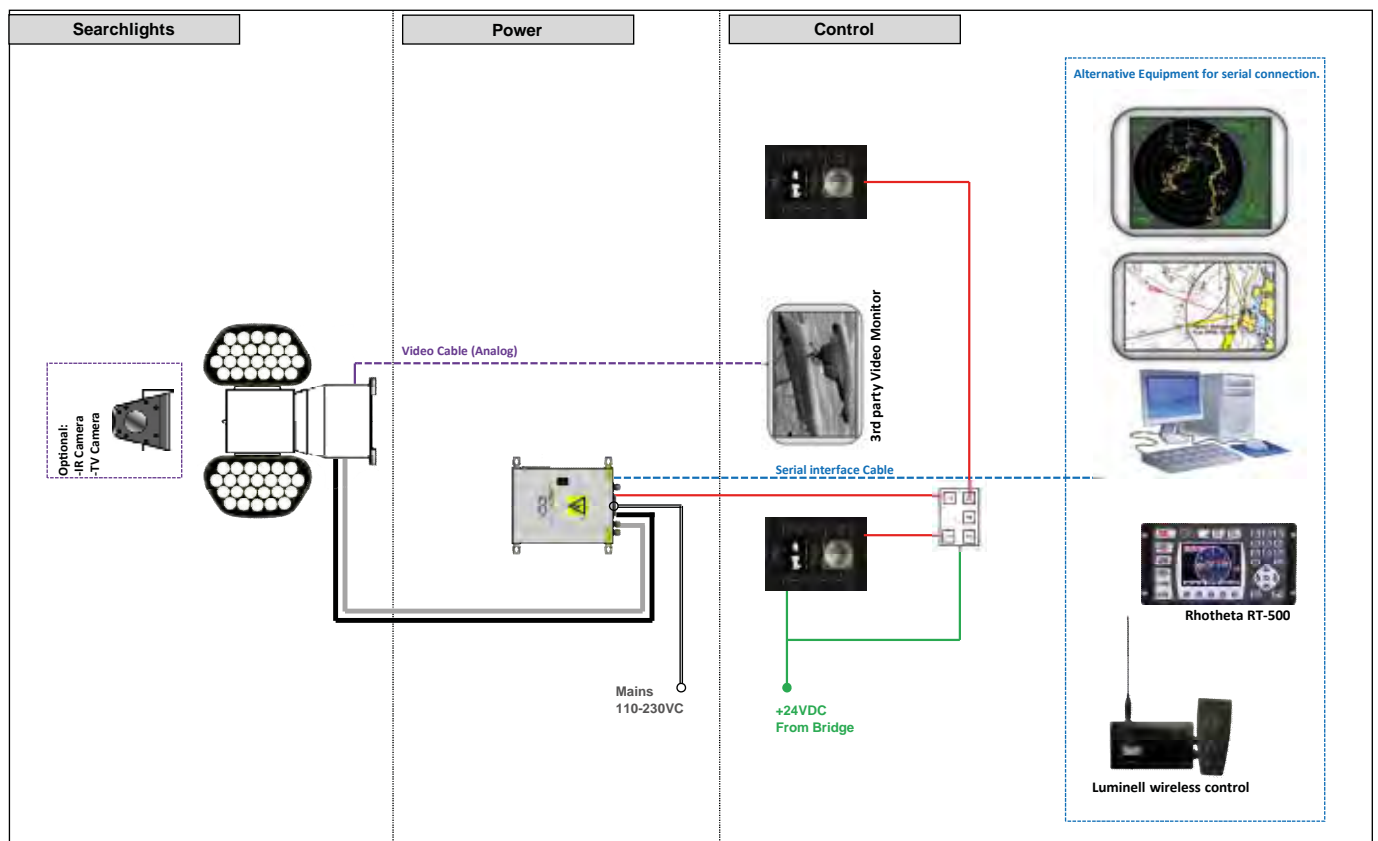

## SL2IR – Searchlight

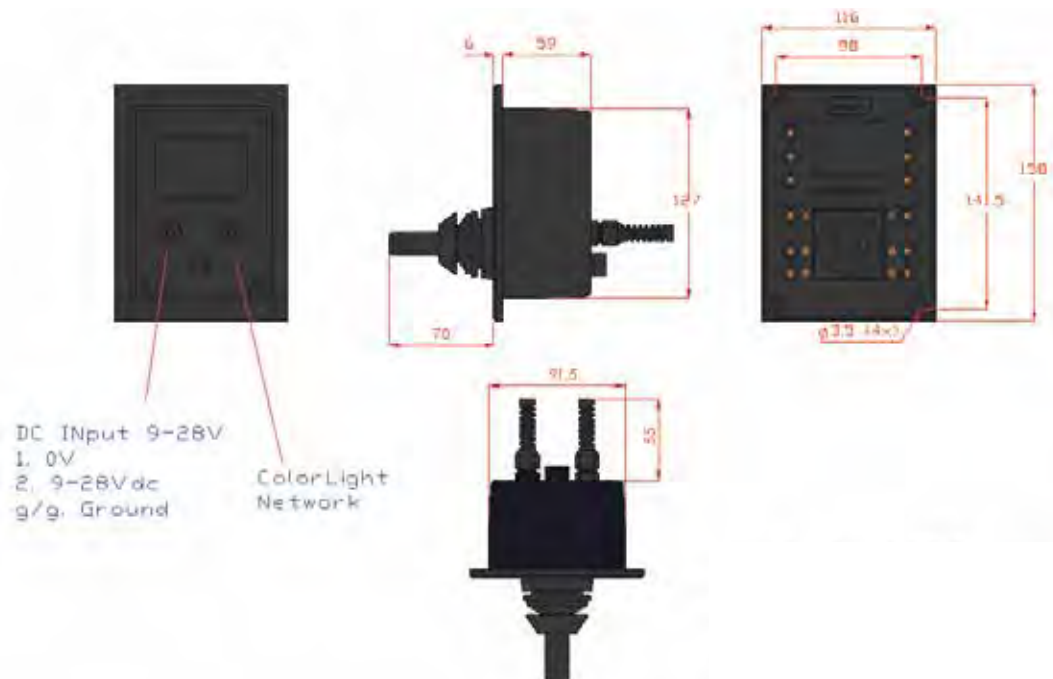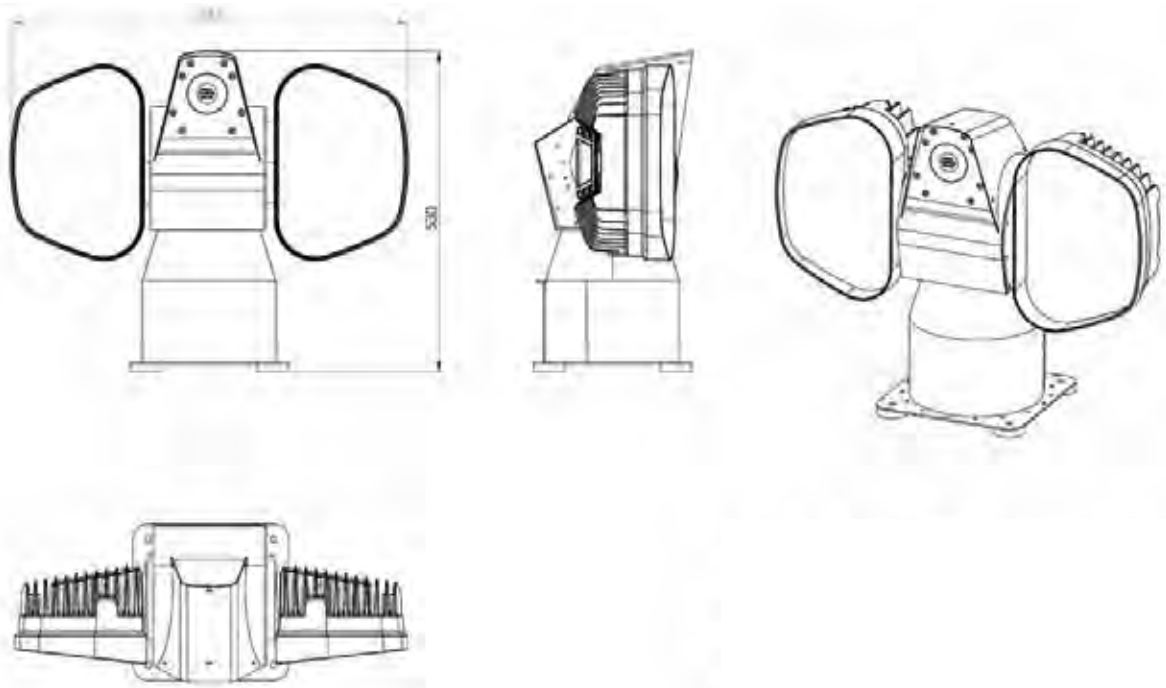



*'My own experience has been very good with the searchlight. It works great in the dark. But even in rain and fog, the results are excellent. The blacklight works great, too. We use the searchlight every night. It's dark here from 22:30 until 04:00 in the morning. We have to cope with a great many icebergs, 'bergy bits' and 'growlers.' The searchlight is definitely a necessary part of the equipment that we need here in order to operate under these conditions.'*

Captain of the S/Y 'Rembrandt van Rijn.



<b>APPLICATIONS:</b>	Search and Rescue, Navigation support, Ice navigation support, Work light, Security surveillance, Oil spill illumination (UV)
<b>TYPE:</b>	HID light source with adjustable beam width
<b>INPUT POWER:</b>	100-240 VAC, 50/60 Hz
<b>PAN/TILT:</b>	Motorised with endless rotation in horizontal and vertical direction
<b>KEY FEATURES:</b>	Low EMC, unlimited movement, daylight characteristics, maintenance free operation, combination UV/IR/HMI/LED light possibility, long range illumination

PART DESCRIPTION	PART NO	NOTE
Searchlight model CL25-11 400W/400W	CLS-25011	Also available in hanging version
Searchlight model CL25-12 400W/UV	CLS-25012	Also available in hanging version
There is a variety of other combinations on the CL25 platform, ask us for more information		



OUTPUT / PERFORMANCE		KEY TECHNICAL INFORMATION	
Range with 1 lux at target	3 200 m	Stainless steel in critical structural parts	
Light beam angle	Adjustable 4-20°	Powder coat white RAL 9016	
Color Rendering (CRI)	90 Ra minimum	IP66	
Color Temperature (CCT)	6000 K	Operating temp -40/+70	
Lumen (lm)	66 000 lm	Bulb lifetime up to 1 000 hours	
Candela (Cd)	10,7 MCd measured		

INPUT INFORMATION
Mains power 100-240 VAC, 50/60 Hz, 1070W, 4,7 A @ 230 VAC (max load)
CAN bus / signal cable 3x2x1 shielded, twisted pair (between searchlight and electrical cabinet)
5G1,5 shielded power cable (between searchlight and electrical cabinet)
<i>For electrical control box and operator panel data, see separate information</i>

ILLUMINATION PRESENTATION									
DISTANCE (M)	BEAM ANGLE	200	500	1000	2000	3000	5000	10000	MAX RANGE 1 LUX
SINGLE SPOT	4°	134 lux Ø 14 m	21 lux Ø 35 m	5,3 lux Ø 70 m	1,3 lux Ø 140 m				2 300 m
DUAL SPOT	4°	268 lux Ø 14 m	42 lux Ø 35 m	10 lux Ø 70 m	2,6 lux Ø 140 m	1,1 lux Ø 210 m			3 200 m
SINGLE WIDE	20°	7 lux Ø 70 m	1 lux Ø 176 m						
Graphics based on data measured in accredited test laboratory. Lux-values are peak values, diam mentioned is spot-zone with min 50% intensity at the periferi.									

DIMENSIONAL OVERVIEW		
Front view	Side view	Top view




<b>APPLICATIONS:</b>	Search and Rescue, Navigation support, Ice navigation support, Work light, Security surveillance, Oil spill illumination (UV)
<b>TYPE:</b>	HID light source with adjustable beam width
<b>INPUT POWER:</b>	100-240 VAC, 50/60 Hz
<b>PAN/TILT:</b>	Motorised with endless rotation in horizontal and vertical direction
<b>KEY FEATURES:</b>	Low EMC, unlimited movement, daylight characteristics, maintenance free operation, combination UV/IR/HMI/LED light possibility, long range illumination




PART DESCRIPTION	PART NO	NOTE
Searchlight model CL35-11 575W/575W	CLS-35011	Also available in hanging version
Searchlight model CL35-12 575W/UV	CLS-35012	Also available in hanging version
There is a variety of other combinations on the CL35 platform, ask us for more information		

OUTPUT / PERFORMANCE	
Range with 1 lux at target	5 300 m
Light beam angle	Adjustable 3-20°
Color Rendering (CRI)	90 Ra minimum
Color Temperature (CCT)	6000 K
Lumen (lm)	98 000 lm
Candela (Cd)	28,7 MCd measured

KEY TECHNICAL INFORMATION
Stainless steel in critical structural parts
Powder coat white RAL 9016
IP66
Operating temp -40/+70
Bulb lifetime up to 1 000 hours

INPUT INFORMATION
Mains power 100-240 VAC, 50/60 Hz
CAN bus / signal cable 4x2x1 shielded, twisted pair (between searchlight and electrical cabinet)
5G2.5 shielded power cable (between searchlight and electrical cabinet)
For electrical control box and operator panel data, see separate information

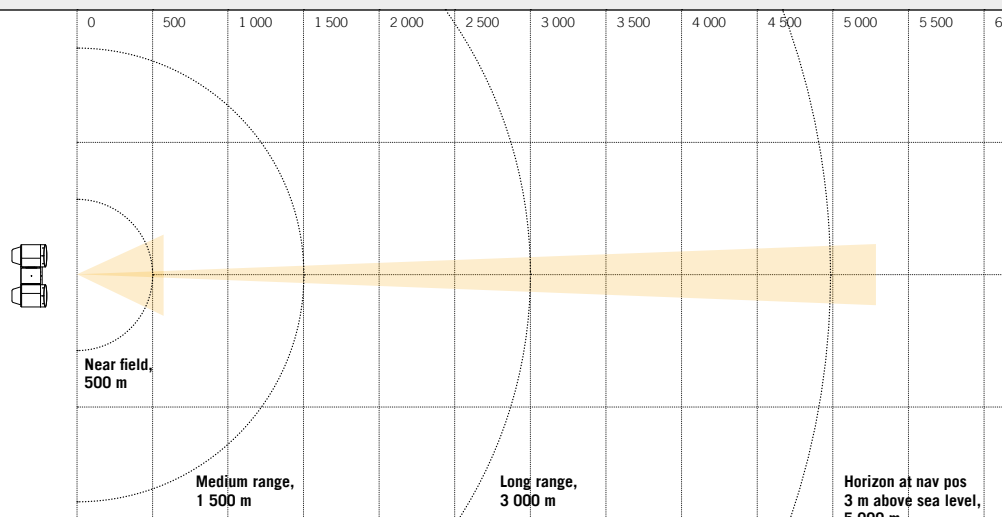ILLUMINATION PRESENTATION																
	0	500	1 000	1 500	2 000	2 500	3 000	3 500	4 000	4 500	5 000	5 500	6 000	6 500	7 000	7 500
Near field, 500 m																
Medium range, 1 500 m																
Long range, 3 000 m																
Horizon at nav pos 3 m above sea level, 5 000 m																
DISTANCE (M)	BEAM ANGLE	200	500	1000	2000	3000	5000	10000	MAX RANGE 1 LUX							
SINGLE SPOT	3°	360 lux Ø 10 m	57 lux Ø 26 m	14 lux Ø 52 m	3,5 lux Ø 105 m	1,6 lux Ø 157 m	0,6 lux Ø 260 m		3 750 m							
DUAL SPOT	3°	720 lux Ø 10 m	114 lux Ø 26 m	28 lux Ø 52 m	7 lux Ø 105 m	3,2 lux Ø 157 m	1,2 lux Ø 260 m		5 300 m							
SINGLE WIDE	20°	12 lux Ø 70 m	2 lux Ø 176 m													
Graphics based on data measured in accredited test laboratory. Lux-values are peak values, diam mentioned is spot-zone with min 50% intensity at the periferi.																

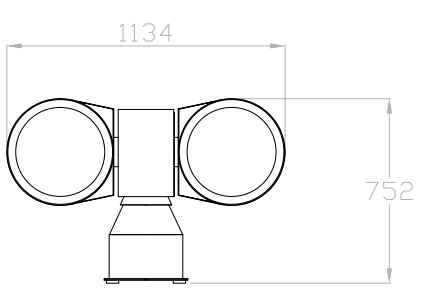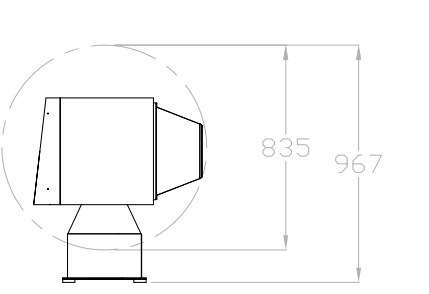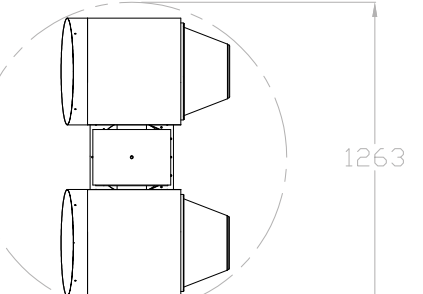DIMENSIONAL OVERVIEW		
		
Front view	Side view	Top view





**A Searchlight** – but also much more. Improving Light at Sea

<b>APPLICATIONS:</b>	Search and Rescue, Navigation support, Ice navigation support, Work light, Security surveillance, Oil spill illumination (UV)
<b>TYPE:</b>	HID light source with adjustable beam width
<b>INPUT POWER:</b>	100-240 VAC, 50/60 Hz
<b>PAN/TILT:</b>	Motorised with endless rotation in horizontal and vertical direction
<b>KEY FEATURES:</b>	Low EMC, unlimited movement, daylight characteristics, maintenance free operation, combination UV/IR/HMI/LED light possibility, long range illumination



PART DESCRIPTION	PART NO	NOTE
Searchlight model CL38-11 800W/800W	CLS-38011	Also available in hanging version
Searchlight model CL38-12 800W/UV	CLS-38012	Also available in hanging version
There is a variety of other combinations on the CL38 platform, ask us for more information		



OUTPUT / PERFORMANCE	
Range with 1 lux at target	6 100 m
Light beam angle	Adjustable 3-20°
Color Rendering (CRI)	90 Ra minimum
Color Temperature (CCT)	6000 K
Lumen (lm)	130 000 lm
Candela (Cd)	38,1 MCd measured

KEY TECHNICAL INFORMATION
Stainless steel in critical structural parts
Powder coat white RAL 9016
IP66
Operating temp -40/+70
Bulb lifetime up to 1 000 hours

INPUT INFORMATION
Mains power 100-240 VAC, 50/60 Hz
CAN bus / signal cable 4x2x1 shielded, twisted pair (between searchlight and electrical cabinet)
5G2.5 shielded power cable (between searchlight and electrical cabinet)
For electrical control box and operator panel data, see separate information

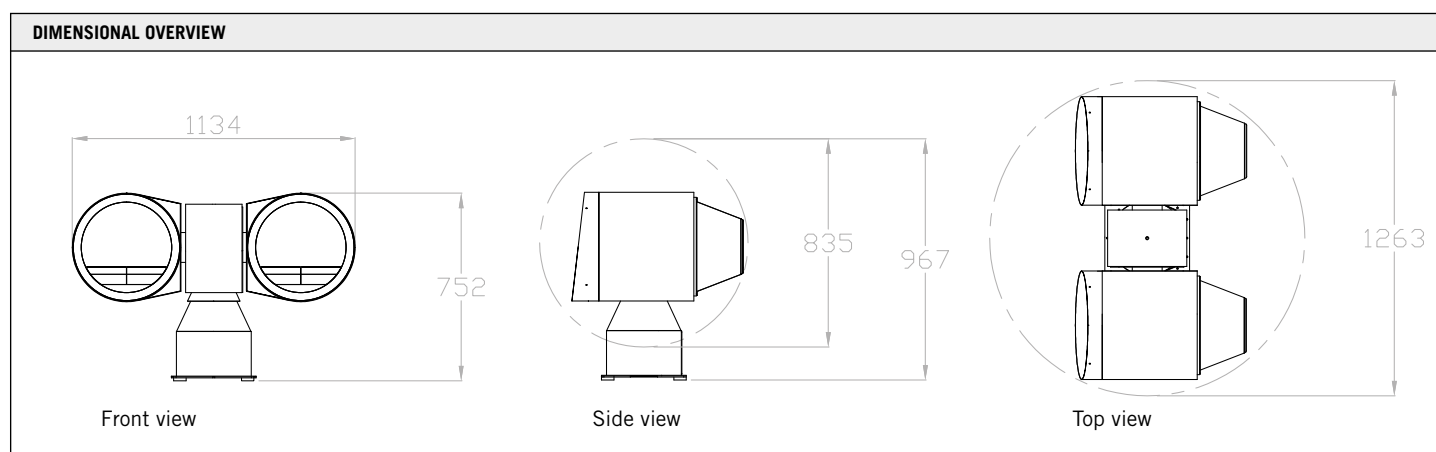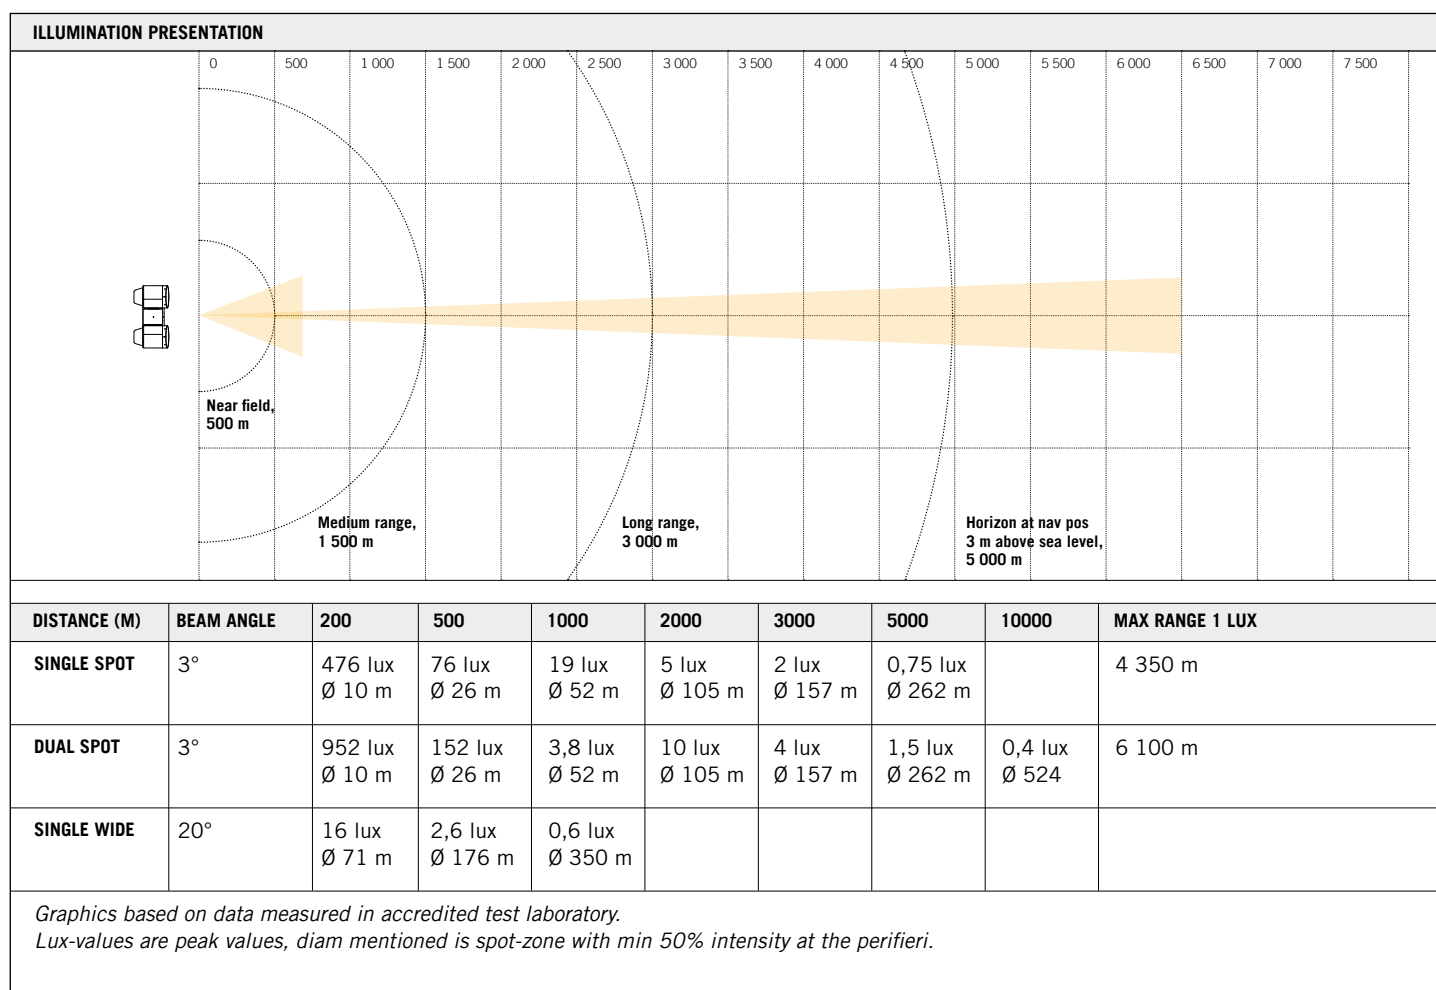



**A Searchlight** – but also much more. Improving Light at Sea


<b>APPLICATIONS:</b>	Search and Rescue, Navigation support, Ice navigation support, Work light, Security surveillance, Oil spill illumination (UV)
<b>TYPE:</b>	HID light source with adjustable beam width as well as integrated thermal imaging system.
<b>INPUT POWER:</b>	100-240 VAC, 50/60 Hz
<b>PAN/TILT:</b>	Motorised with endless rotation in horizontal and vertical direction
<b>KEY FEATURES:</b>	Low EMC, unlimited movement, daylight characteristics, maintenance free operation, combination UV/IR/HMI/LED light possibility.




PART DESCRIPTION	PART NO	NOTE
Searchlight model CLIR25-11 HID 400W/400W with IR cam, 336 res, 25 mm lens	CLS-25026	Also available in hanging version
Camera core upgrade to 640 res, 25 mm lens	CLN0530	
There is a variety of other combinations on the CLIR25 platform, ask us for more information		

OUTPUT / PERFORMANCE	
Range with 1 lux at target	3 200 m
Light beam angle	Adjustable beam 4-20°
Color Rendering (CRI)	90 minimum
Color Temperature (CCT)	6000 K
Lumen (lm)	66 000 lm
Candela (Cd)	10,7 MCd measured


KEY TECHNICAL INFORMATION
Stainless steel in critical structural parts
Powder coat white RAL 9016
IP66
Operating temp -40/+70
Bulb lifetime up to 1 000 hours
For IR cam details, see separate pages in this catalogue.

INPUT INFORMATION
Mains power 100-240 VAC, 50/60
CAN bus / signal cable 4x2x1 shielded, twisted pair (between searchlight and electrical cabinet)
5G1.5 shielded power cable (between searchlight and electrical cabinet)
For electrical control box and operator panel data, see separate information

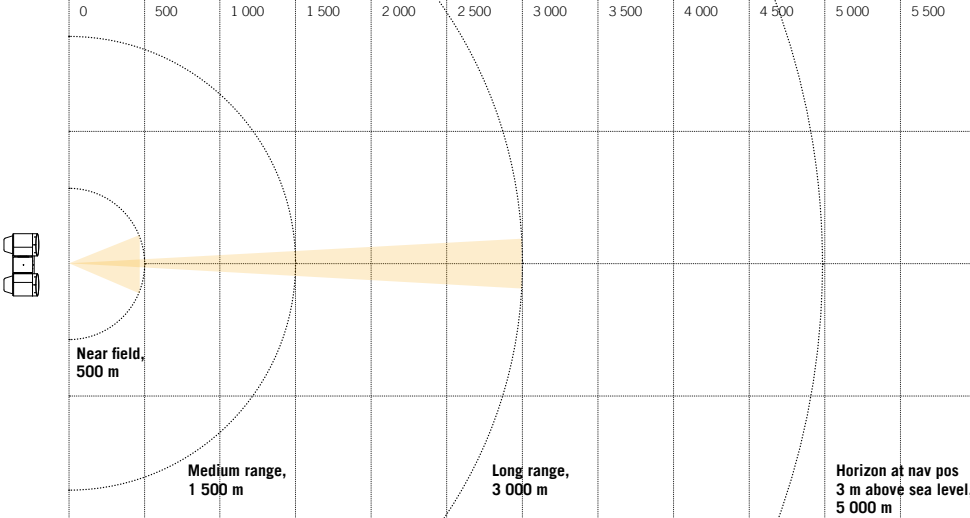ILLUMINATION PRESENTATION																
	0	500	1 000	1 500	2 000	2 500	3 000	3 500	4 000	4 500	5 000	5 500	6 000	6 500	7 000	7 500
DISTANCE (M)	BEAM ANGLE	200	500	1000	2000	3000	5000	10000	MAX RANGE 1 LUX							
DUAL SPOT	4°	268 lux Ø 14 m	42 lux Ø 35 m	10 lu Ø 70 m	2,6lux Ø 140 m				3 200 m							
IR STD 336 RES	FOW 13x10°	800 m Detection man 2 000 m Detection small vessel														
IR STD 640 RES	FOW 25x20°	900 m Detection man 2 800 m Detection small vessel														
Graphics based on data measured in accredited test laboratory. Lux-values are peak values, diam mentioned is spot-zone with min 50% intensity at the periferi.																

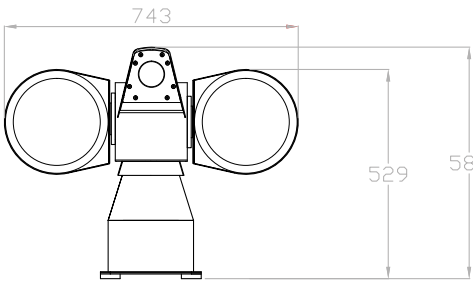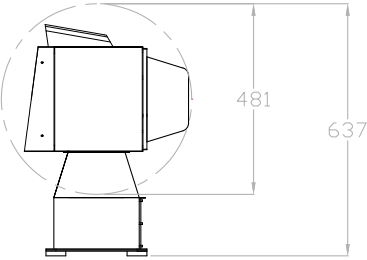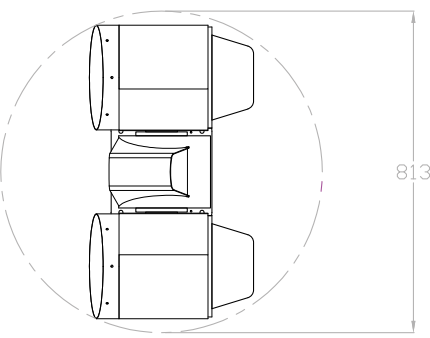DIMENSIONAL OVERVIEW		
		
Front view	Side view	Top view



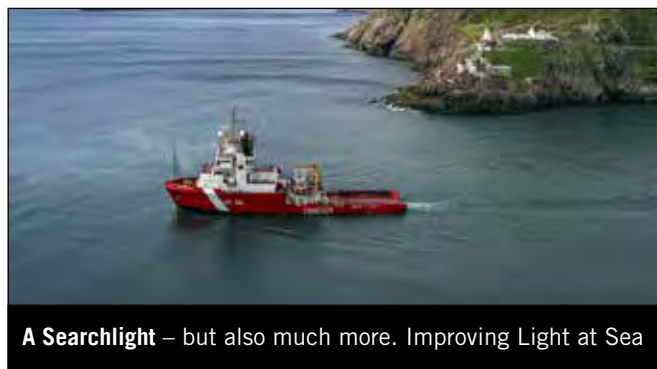

**A Searchlight** – but also much more. Improving Light at Sea

<b>APPLICATIONS:</b>	Search and Rescue, Navigation support, Ice navigation support, Work light, Security surveillance, Oil spill illumination (UV)
<b>TYPE:</b>	HID light source with adjustable beam width as well as integrated thermal imaging system.
<b>INPUT POWER:</b>	100-240 VAC, 50/60 Hz
<b>PAN/TILT:</b>	Motorised with endless rotation in horizontal and vertical direction
<b>KEY FEATURES:</b>	Low EMC, unlimited movement, daylight characteristics, maintenance free operation, combination UV/IR/HMI/LED light possibility.

PART DESCRIPTION	PART NO	NOTE
Searchlight model CLIR35-11 HID 575W/ 575W with IR cam, 336 res, 25 mm lens	CLS-35026	Also available in hanging version
Camera core upgrade to 640 res, 25 mm lens	CLN0530	
There is a variety of other combinations on the CLIR35 platform, ask us for more information		



OUTPUT / PERFORMANCE		KEY TECHNICAL INFORMATION	
Range with 1 lux at target	5 300 m	Stainless steel in critical structural parts	
Light beam angle	Adjustable beam 3-20°	Powder coat white RAL 9016	
Color Rendering (CRI)	90 minimum	IP66	
Color Temperature (CCT)	6000 K	Operating temp -40/+70	
Lumen (lm)	98000 lm	Bulb lifetime up to 1 000 hours	
Candela (Cd)	28,7 MCd measured	For IR cam details, see separate pages in this catalogue.	

INPUT INFORMATION
Mains power 100-240 VAC, 50/60
CAN bus / signal cable 4x2x1 shielded, twisted pair (between searchlight and electrical cabinet)
5G1.5 shielded power cable (between searchlight and electrical cabinet)
<i>For electrical control box and operator panel data, see separate information</i>

ILLUMINATION PRESENTATION									
<p>Near field, 500 m</p> <p>Medium range, 1 500 m</p> <p>Long range, 3 000 m</p> <p>Horizon at nav pos 3 m above sea level, 5 000 m</p>									
DISTANCE (M)	BEAM ANGLE	200	500	1000	2000	3000	5000	10000	MAX RANGE 1 LUX
DUAL SPOT	3°	720 lux Ø 10 m	114 lux Ø 26 m	28 lux Ø 52 m	7 lux Ø 105 m	3,2 lux Ø 157 m	1,2 lux Ø 260 m		5 300 m
IR STD 336 RES	FOW 13x10°	800 m Detection man 2 000 m Detection small vessel							
IR STD 640 RES	FOW 25x20°	900 m Detection man 2 800 m Detection small vessel							
Graphics based on data measured in accredited test laboratory. Lux-values are peak values, diam mentioned is spot-zone with min 50% intensity at the periferi.									

DIMENSIONAL OVERVIEW		
Front view	Side view	Top view



**A Searchlight** – but also much more. Improving Light at Sea

<b>APPLICATIONS:</b>	Search and Rescue, Navigation support, Ice navigation support, Work light, Security surveillance, Oil spill illumination (UV)
<b>TYPE:</b>	HID light source with adjustable beam width as well as integrated thermal imaging system.
<b>INPUT POWER:</b>	100-240 VAC, 50/60 Hz
<b>PAN/TILT:</b>	Motorised with endless rotation in horizontal and vertical direction
<b>KEY FEATURES:</b>	Low EMC, unlimited movement, daylight characteristics, maintenance free operation, combination UV/IR/HMI/LED light possibility.

PART DESCRIPTION	PART NO	NOTE
Searchlight model CLIR38-11 HID 800W/ 800W with IR cam, 336 res, 25 mm lens	CLS-38026	Also available in hanging version
Camera core upgrade to 640 res, 25 mm lens	CLN0530	
There is a variety of other combinations on the CLIR38 platform, ask us for more information		

OUTPUT / PERFORMANCE	
Range with 1 lux at target	6 100 m
Light beam angle	Adjustable beam 3-20°
Color Rendering (CRI)	90 minimum
Color Temperature (CCT)	6000 K
Lumen (lm)	130 000 lm
Candela (Cd)	38,1 MCd measured

KEY TECHNICAL INFORMATION
Stainless steel in critical structural parts
Powder coat white RAL 9016
IP66
Operating temp -40/+70
Bulb lifetime up to 1 000 hours
For IR cam details, see separate pages in this catalogue.

INPUT INFORMATION
Mains power 100-240 VAC, 50/60
CAN bus / signal cable 4x2x1 shielded, twisted pair (between searchlight and electrical cabinet)
5G2.5 shielded power cable (between searchlight and electrical cabinet)
For electrical control box and operator panel data, see separate information

ILLUMINATION PRESENTATION									
<p>Near field, 500 m</p> <p>Medium range, 1 500 m</p> <p>Long range, 3 000 m</p> <p>Horizon at nav pos 3 m above sea level, 5 000 m</p>									
DISTANCE (M)	BEAM ANGLE	200	500	1000	2000	3000	5000	10000	MAX RANGE 1 LUX
DUAL SPOT	3,0	952 lux Ø 10 m	152 lux Ø 26 m	3,8 lux Ø 52 m	10 lux Ø 105 m	4 lux Ø 157 m	1,5 lux Ø 262 m	0,4 lux Ø 524	6 100 m
IR STD 336 RES	FOW 13x10°	800 m Detection man 2 000 m Detection small vessel							
IR STD 640 RES	FOW 25x20°	900 m Detection man 2 800 m Detection small vessel							
<p>Graphics based on data measured in accredited test laboratory.</p> <p>Lux-values are peak values, diam mentioned is spot-zone with min 50% intensity at the periferi.</p>									

DIMENSIONAL OVERVIEW		
Front view	Side view	Top view

Our searchlight system can be set up with different levels of complexity - from our Basic Solution to a more advanced control integration. The most important factor is that you as a customer receive the right solution for your needs, improving light at sea. One important thing to note is that our systems are expandable - easy to upgrade and add further solutions and functionality.

## The Basic Solution

The Luminell Basic Solution setup contains a searchlight, electronic control box and an operator panel; an effective and straight forward setup. Place the searchlight in a position which allows the light beam to reach as much area as possible around your vessel. Next place the electronic control box in an appropriate environment, and finally place the operator panel where it suits the operator best.

We also have a software upgrade available, Package 2 (Sweep, fixed positions, surveillance) increasing automatic operations and simplifying your work.



## Customized control solutions

We have developed more simplified, one button control function, which can be driven by specific customer demands.

Helideck control button – press the allocated button and the searchlight lights up and goes to a pre-set position. Press the button again – the searchlight lights off and goes back to a park position.


Another example is the solution RHOTHETA Radio Detection Finder control integration.

Press the allocated button, the searchlight lights up and follows the NMEA-output of the RHOTHETA Radio Detection Finder, most likely picking up the radio signal from the MOB beacon and defines the bearing from the vessel to a man or a vessel in distress. If you focus your light on the SAR operation, the searchlight will automatically follow and illuminate the target.



## The Network Solution

The Network Solution contains multiple searchlights in combination with one or many operator panels. It connects all units with an Ethernet Switch and can access any system in the network from any control panel. A suitable software upgrade is our Package 3, which gives you synchronised control of multiple searchlights - where one or more searchlights will follow a master searchlight, increasing light power, and giving you the ease of simplified control by operating only one operator panel. Luminell can also create a block schematic solutions diagram, giving you an overview of your desired network.

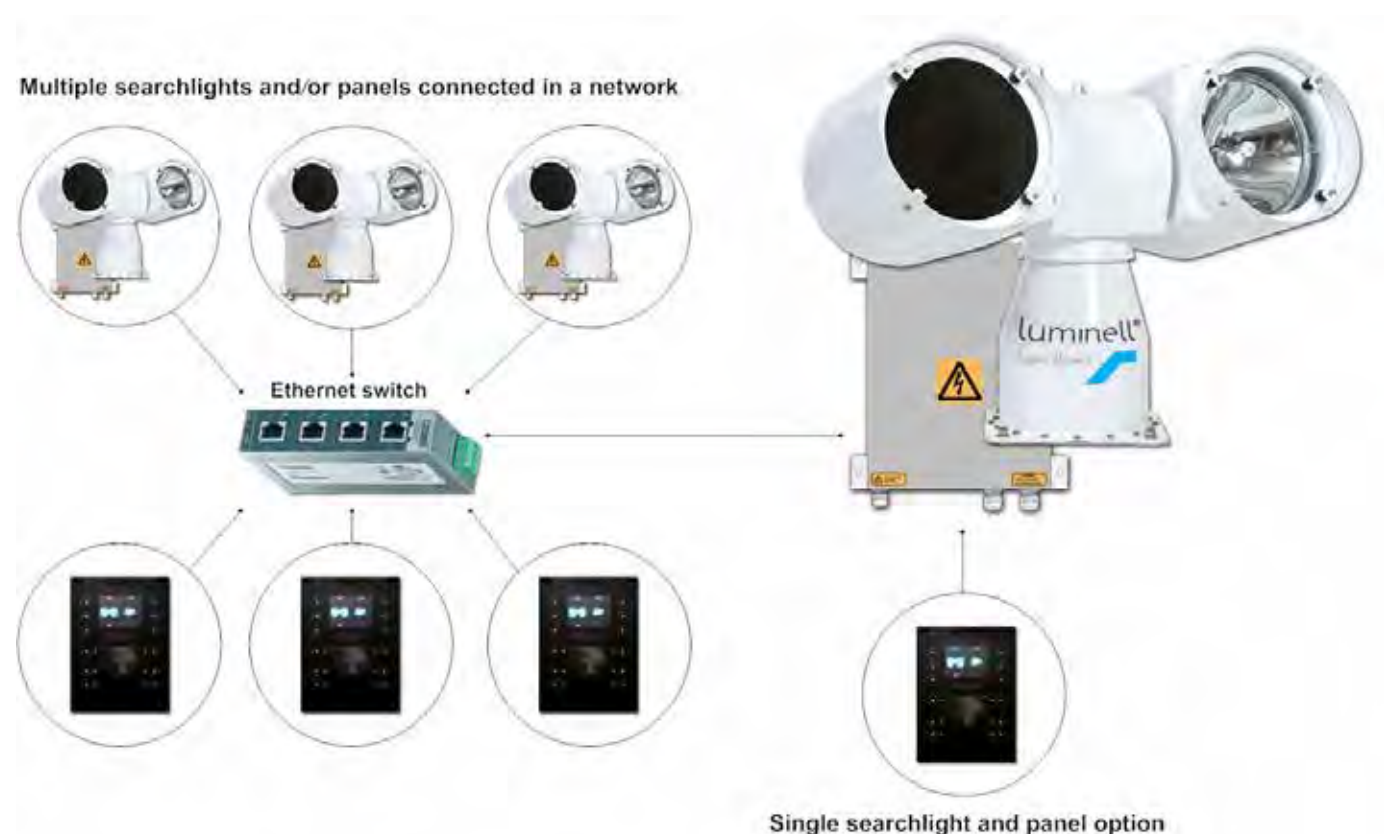

## Customized control solutions

We have developed more simplified, one button control function, which can be driven by specific customer demands.

Helideck control button – press the allocated button and the searchlight lights up and goes to a pre-set position.

Press the button again – the searchlight lights off and goes back to a park position.

Another example is the solution RHOTHETA Radio Detection Finder control integration.

Press the allocated button, the searchlight lights up and follows the NMEA-output of the RHOTHETA Radio Detection Finder, most likely picking up the radio signal from the MOB beacon and defines the bearing from the vessel to a man or a vessel in distress. If you focus your light on the SAR operation, the searchlight will automatically follow and illuminate the target.

## Control Integration Solutions

Our systems have been developed for the easy integration of both basic and advanced controls.

The electronics and the control software are well designed for one-man bridge solutions, as well as defined single button control functionality.

A good example of a more advanced integration is when functionality and control into the vessel's bridge and security system is made, by using input from Radar, GPS, AIS and other targets to define the manoeuvring of the searchlight. In this instance it is up to your requirements and the creativity of the system integrator to determine whether or not you fully utilise the full potential of our systems.


Many bridge system integrators have already integrated with our products. Should you wish to learn more about this, we'd be happy to provide you with references.

To simplify the integration of multiple searchlights, or to add the CL internal LAN network to the vessel's LAN system, we have developed an Integration Gateway. The Integration Gateway is a gateway and a single access point to a network of multiple searchlights – simplifying external control integration from a single controller or from a LAN network. Additionally it is also a programmable computer, making it possible for Luminell to offer the development of customised control functions as an optional feature.

CL35-12

SL2IR

CL35-21

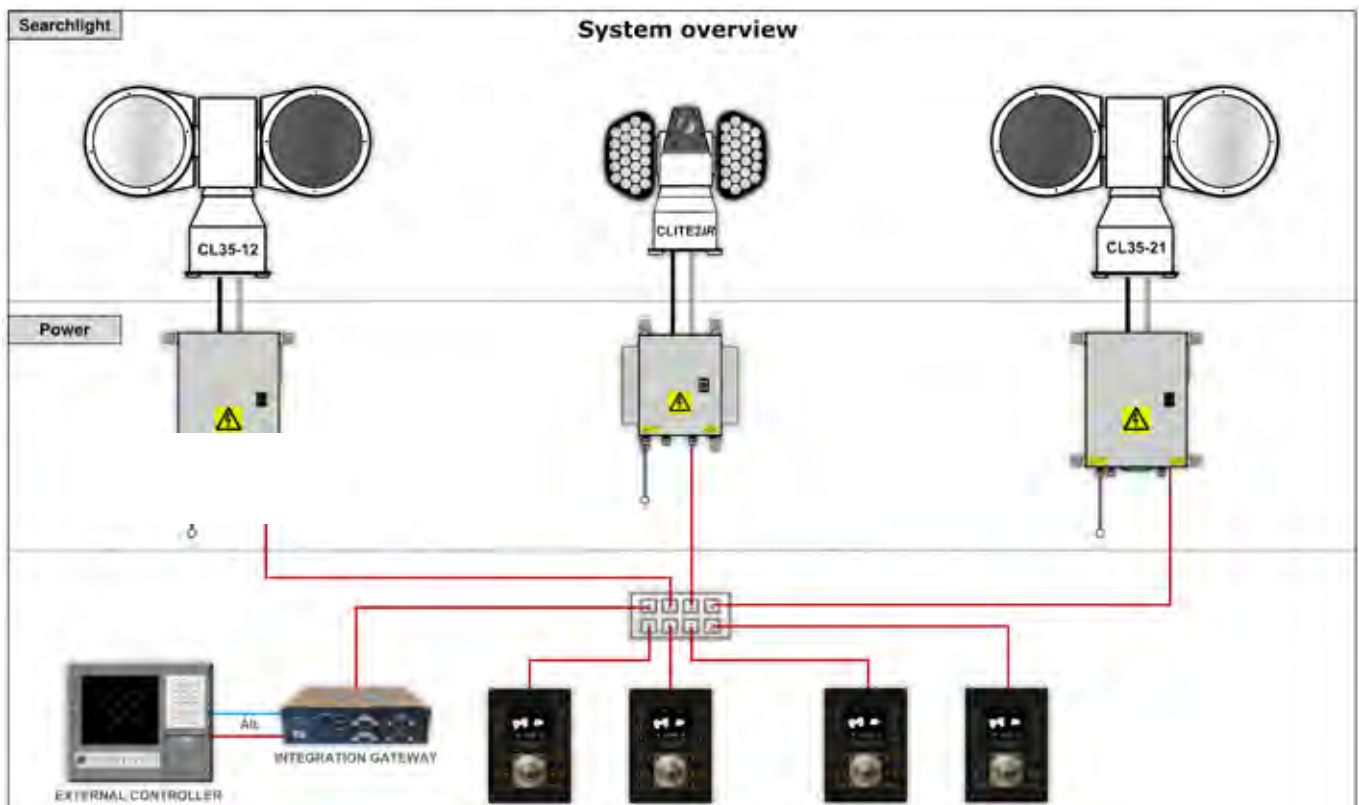

### Thermal camera solutions integrated in our searchlights – CLIR/SL2IR

The thermal night vision camera unit from FLIR® is placed into a robust, modern designed housing and mounted on top of the searchlight's middle-section. This means that the camera always follows the searchlight's horizontal movement from the joystick. The thermal camera is mounted in a special tilt unit which makes it easy to adjust the camera vertically from the operator panel.

The front section of the unit features a germanium window with an integrated temperature-controlled and self-regulating heating element. The element prevents condensation and ice build-up on the front window that could otherwise disrupt the camera's line of sight. The infrared thermal camera provides a clear picture based on temperature differences, even in complete darkness. This is possible as the camera is sensitive to thermal infrared radiation.

All objects with a temperature over the absolute zero point -273 C (0 degree K) generates infrared radiation. The hotter the temperature, the more infrared radiation. The IR sensor also senses differences of the material's emissivity, reflection and transmission. *Emissivity being the material's capability to emit infrared radiation, Reflection being the material's capability to reflect infrared radiation and Transmission being the material's capability of transmitting infrared radiation.*

Materials with a temperature over -273 C will be detected by the thermal sensor and different materials with same temperature will appear different on the monitor due to the different properties in the materials. The vulnerability of having an uncooled thermal sensor is that rain, fog or snow can reduce the optical sight and can also effect the range of IR detection. Depending on distance, the size of the object and the level of temperature (IR radiation) there is no simple answer as to how much the detection range is affected – (nevertheless it is affected).

Luminell work primarily with two alternative sensor resolutions; our standard version is a 336 core with a 25 mm focal lens, with an optional upgrade to a 640 core with 25 mm lens. The upgrade improves the resolution with an extended detection range and field of view.


A combined solution with a thermal sensor and light will yield improved visibility, subject to the actual conditions during operation.

### Thermal unit

Camera core type	FLIR (uncooled longwave thermal imager)	
Lens	25mm*1	
Field of view	13x10 degrees (25x20 degrees for 640 core)	
Video output	Analog Channel Composite Video (Male RCA connector) PAL (Standard), NTSC. To change the video standard, see section 3.SET CAM VIDEO STANDARD	
Camera type	FLIR Tau 2, 336 (standard)	FLIR Tau 2, 640 (optional)
Detector resolution	336x256, 17µm	640 x 512, 17µm
Video resolution	640 x 480 (NTSC);	640 x 512 (PAL)*2
Refresh rate	25 Hz (PAL), 30 Hz (NTSC)	
Detection man/vessel	800m / 2000m	
Recognition man/vessel	200m / 550m	
Identification man/vessel	100m / 300m	

\*1 Other lens types available upon request

\*2 Tau 336 & 324 analog video is upsampled & interpolated to 640 x 480 for NTSC, and to 640 x 512 for PAL

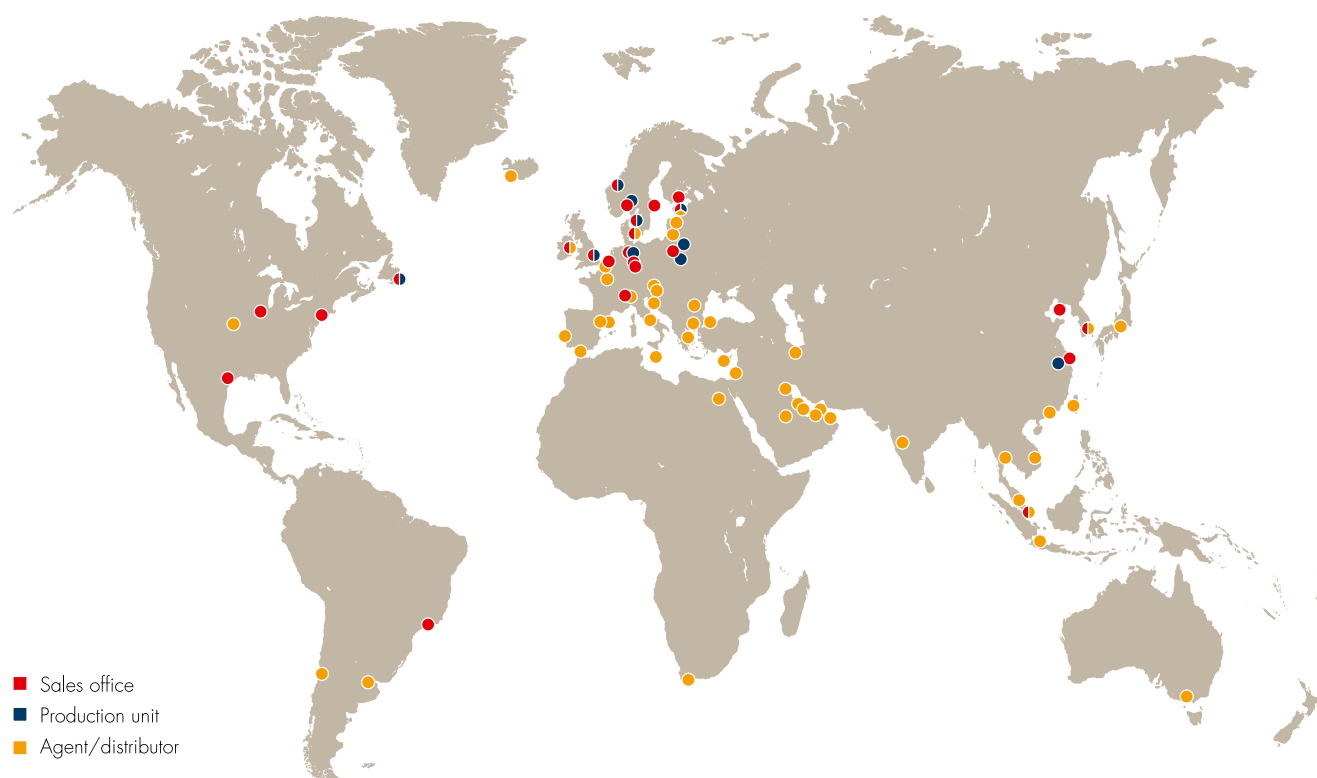

- Sales office
- Production unit
- Agent/distributor

#### Germany

- Glamox Marine and Offshore GmbH  
BU Glamox Marine Germany  
Bremen  
Tel +49 421 36 93 52-0  
sales.marinegermany@glamox.com

- Glamox Marine and Offshore GmbH  
BU LINKSrechts  
Seevetal  
Tel: +49 (0) 4105 580 59 0  
info@LINKSrechts.de

#### Norway

- Glamox AS  
Glamox Northern Europe  
Molde  
Tel +47 71 25 04 00  
info.gi@glamox.com

#### The Netherlands

- Glamox B.V.  
Numansdorp  
Tel +31 186 653 111  
info.nl@glamox.com

#### Canada

- Glamox Inc.  
St. John's  
Newfoundland  
Tel +1 709 753 2373  
sales@glamox.ca

#### USA

- Glamox Aqua Signal Corporation  
Houston, Texas  
Tel +1 (281) 944-4100  
glamoxus@glamox.com

#### Brazil

- Glamox Brasil Iluminacao LTDA  
Rio de Janeiro  
Tel + 55 (21) 36 17 6003  
arlando.moreira@glamox.com

#### Singapore

- Glamox PTE. LTD  
Singapore  
Tel +65 6748 1977  
Fax +65 6742 9711  
sales@glamoxfe.com.sg

#### China

- Glamox Trading Co.Ltd.  
Shanghai  
Tel +86 21 6039 3310  
info@glamoxcn.com

#### South-Korea

- Glamox Co. Ltd.  
Busan  
Tel +82 51 971 7200  
info@glamox.co.kr



Specifications are subject to change at any oint without prior notice.  
Please check out our website to find the newest version.

**Theunissen Technical Trading BV** | Rijkweg 191, 6581 EK Malden, Nederland  
T +31 (0)24 358 44 55 | info@tttbv.com | www.tttbv.com