


HOLLAND STANDARD

1507

BALLAST UNIT FOR FLOODLIGHT

Application	Ballasts for non explosion proof areas
Protection degree	IP67
Housing	Stainless steel deep drawn, seamless
Finish	Powder coated white RAL 9010
Cable entry	Brass glands M24x1,5
Mounting	2 welded brackets with 2 mounting holes each, \varnothing 10.5mm

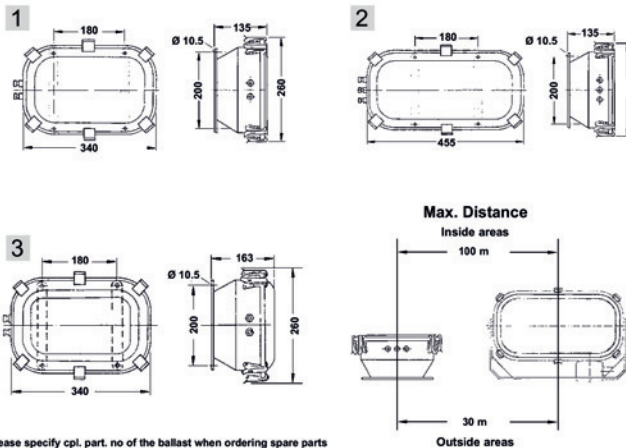

PART NO.

1507002000	1 x 400W, HPS, 230V 50Hz, h.p.f.c.~
1507004000	1 x 400W, HPS, 220V 60Hz, h.p.f.c.~
1507006000	2 x 400W, HPS, 220V 50Hz, h.p.f.c.~
1507008000	2 x 400W, HPS, 220V 60Hz, h.p.f.c.~

WEIGHT

7,8 kg
7,8 kg
13,6 kg
13,6 kg

h.p.f.c.~ compensated version (with capacitor)