
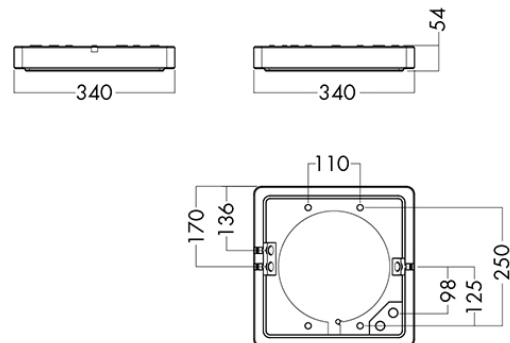


HOLLAND STANDARD

AL60/61

AL60/61 SURFACE MOUNTED LIGHT INSIDE/OUTSIDE

Application	Indoor (AL60) / Outdoor (AL61)
Protection degree	IP54 (AL60) - IP65 (AL61)
Housing	Die-cast Aluminium painted in polyester powder paint in color Grey (RAL 9006), White (RAL 9016) or Black (RAL 9005).
Cable insert	3 x M20 grommet cable gland takes cables from 7 - 11mm dia.
Light source	LED
Supply voltage	230V
Mounting	Surface or wall mounting, fixed with 4 screws

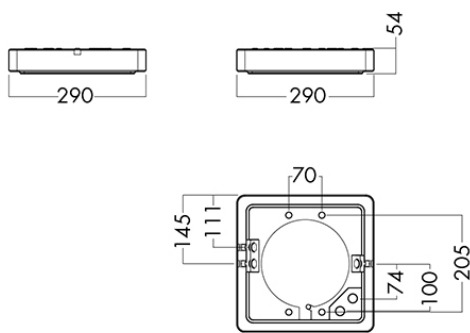

PART NO.

AL60 series (inside)

AL6031305	1000 HF 830 GR/GR	2,3 kg
AL6031309	1000 HF 830 WH/WH	2,8 kg
AL6041304	1700 HF 830 GR/GR	3,1 kg
AL6041308	1700 HF 830 WH/WH	3,0 kg

Other color decor; black/chrome/copper on request

AL61 series (outside)

AL6131300	1000HF 830 GR	2,6 kg
AL6131301	1000HF 830 WH	2,6 kg
AL6141300	1700HF 830 GR	3,4 kg
AL6141301	1700HF 830 WH	3,3 kg

WEIGHT

