


NAVIGATION LIGHTS SERIES 65

Application	For vessels ≥ 20m. For inland waterways without limitation of ship's length
Protection degree	IP56
Housing	Polycarbonate, glass fibre reinforced, other components of non-corrosive materials. Non magnetic, seawater resistant, housing colour black
Light source	High power LED (included), upper section main system, lower section backup system
Mounting	4 hole mounting with connectionbox, 2 x M25 x 1.5 cable entry
Options	- Housing white - Brass housing - Artic version incl. de-icing function

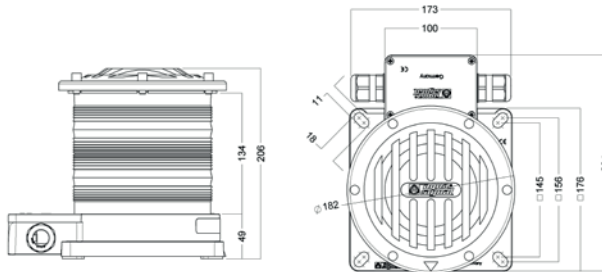

PART NO.

366310x000	Starboard, 3 nm, main/reserve
366420x000	Port, 3 nm, main/reserve
366100x000	Masthead, 6 nm, main/reserve
366270x000	Stern, 3 nm, main/reserve
366240x000	Stern yellow, 3 nm, main/standby
366070x000	All round white/anchor/RIM, 3 nm, main/reserve
366020x000	All round red/NUC, 3 nm, main/reserve
366010x000	All round green, 3 nm, main/reserve
366040x000	All round yellow, 3 nm, main/reserve
366000x000	White manoeuvre light, 5 nm, main/reserve
366030X000	Passing light green/red, 3 nm, main/reserve
366030X000	Passing light red/green, 3 nm, main/reserve

WEIGHT

3,3 kg
3,3 kg
3,3 kg
3,3 kg
3,3 kg
3,3 kg
3,3 kg
3,3 kg
3,3 kg
3,3 kg
3,3 kg
3,3 kg

X = 3 : main 24V DC / reserve 24V DC
 X = 5 : main 115-230V AC / reserve 115-230V AC
 X = 6 : main 115-230V AC / reserve 24V DC