
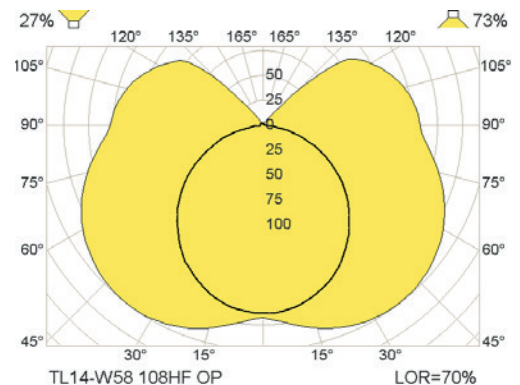


### TL14 MIRROR LUMINAIR

<b>Application</b>	Accommodation areas, shower rooms, wash rooms, toilets
<b>Protection degree</b>	IP44, with universal socket IP23
<b>Housing</b>	Steel housing with spring operated plastic end caps
<b>Finish</b>	Powder coated white RAL 9016
<b>Diffuser</b>	Opal polycarbonate
<b>Cable entry</b>	One hole Ø19 with grommet in back. One knock-out Ø19 at top
<b>Lamp base</b>	G13
<b>Light source (not incl.)</b>	T26 fluorescent lamp 15W
<b>Mounting</b>	To be installed directly to wall or ceiling, 2 holes Ø5mm

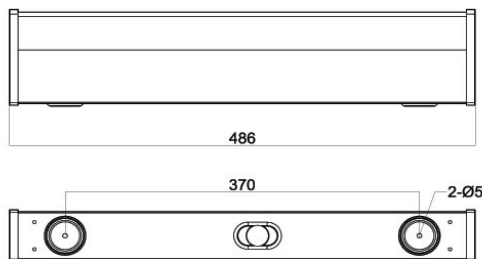

**PART NO.**

<a href="#">TL14000814</a>	1 x 15W 220/230V 50/60Hz OP
<a href="#">TL14000845</a>	1 x 15W 220/230V 50/60Hz S OP
<a href="#">TL14000852</a>	1 x 15W 220/230V 50/60Hz SU OP
<a href="#">TL14000869</a>	1 x 15W 220/230V 50/60Hz SSC OP

**WEIGHT**

1,4 kg
1,4 kg
2,0 kg
1,5 kg

<a href="#">TL14183814</a>	LED 800HF 830 OP
<a href="#">TL14183845</a>	LED 800HF 830 S OP
<a href="#">TL14183821</a>	LED 800HF 830 U OP
<a href="#">TL14183852</a>	LED 800HF 830 SU OP

1,4 kg
1,4 kg
2,0 kg
2,0 kg

OP = opal diffuser  
 S = switch  
 SU = switch, universal razor socket with transformer/selector 230/110- 230V  
 SSC = switch and schuko type socket