
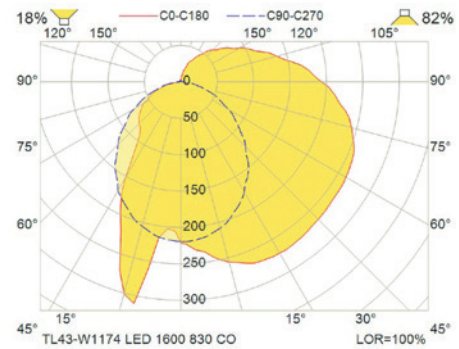


HOLLAND STANDARD

TL43

TL43 CORNICE LUMINAIRE

Application	Accommodation areas, passage ways
Protection degree	IP20
Housing	Zinc coated steel sheet, white RAL9016
Finish	Powder coated white RAL 9016
Diffuser	Clear polycarbonate
Cable entry	2 inlets for max. cable dia. 20,5mm
Light source	LED (included)
Mounting	to be installed directly to wall or ceiling

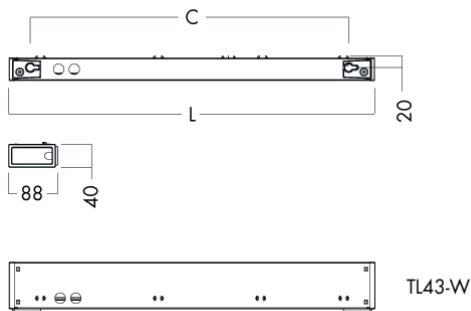

Type	L	C
TL43W 574 LED	574	490
TL43W 1174 LED	1174	1090

PART NO.

K38000015 B15 emergency lampholder

[TL43513063](#) TL43 LED - W574 220-240V 800HF 830 CO
[TL43513067](#) TL43 LED - W1174 220-240V 1800HF 830 CO

WEIGHT

1,3 kg
 1,9 kg