
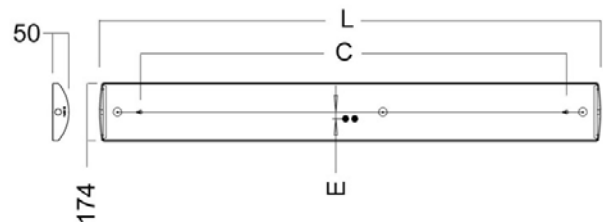


HOLLAND STANDARD

TL44-S
G2 LED

TL44 CEILING LUMINAIRE, SURFACE

Application	Accommodation areas, public areas etc.
Protection degree	IP44
Housing	Galvanised steel sheet, white
Finish	Powder coated white RAL 9016
Diffuser	Clear or opal polycarbonate
Cable entry	1 x Ø19 mm knock-out in each end cap and 2 x membrane glands in top
Lamp base	2 x T5 14, 28 W.
Light source	LED
Supply voltage	230V
Mounting	4 / 6 mounting holes, Ø 5mm
Remarks	On request with dimming or 1 or 3 hours emergency backup battery.

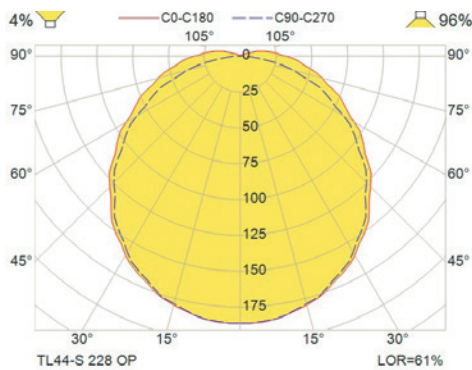

Size	L	C	E
TL44-S G2 LED 2000	630	400	20.5
TL44-S G2 LED 3600	1230	1000	20.5

PART NO.

TL44090542	TL44-S G2 LED 2000 HF 830 OP
TL44090550	TL44-S G2 LED 3600 HF 830 OP
TL44090686	TL44-S G2 LED 2000 HF E3/S 830 OP
TL44090556	TL44-S G2 LED 3600 HF E3/S 830 OP

WEIGHT

1,8 kg
3,0 kg
2,3 kg
3,1 kg