
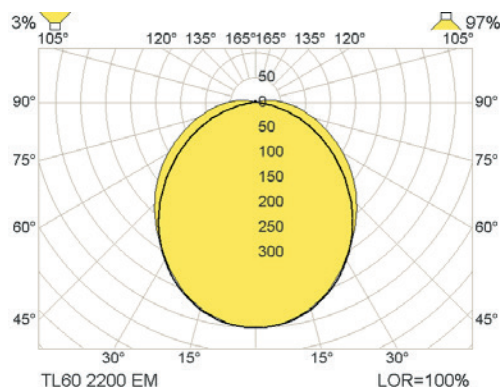


TL60 TECHNICAL OUTDOOR LUMINAIRE LED

Application	Areas like car decks, open decks, engine rooms and other demanding application areas
Protection degree	IP66/67
Housing	Seawater resistant, galvanized aluminium housing
Cable insert	2 x M25 x 1.5 polyamide D7-17mm
Light source	LED 2 x 10W / 2 x 20W
Mounting	Mounted to the ceiling or cable trays by: screws, different screwed or welded mounting brackets, shock mounts or triangles are available. Mounting distance adjustable.

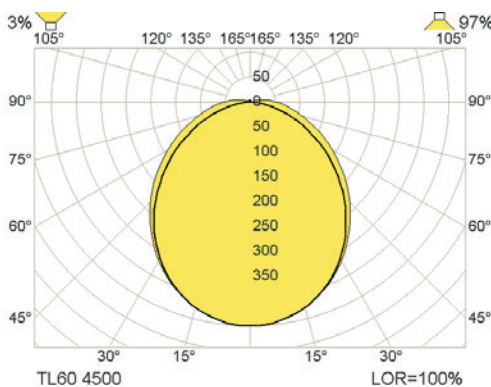

PART NO.

TL60404001	2 x 10W / 2200lm 840 110-240VAC, M25 AS
TL60404002	2 x 10W / 2200lm 840 110-240VAC, M25 GL
TL60704001	2 x 20W / 4500lm 840 110-240VAC, M25 AS
TL60704002	2 x 20W / 4500lm 840 110-240VAC, M25 GL

WEIGHT

3,6 kg
3,7 kg
6,5 kg
6,7 kg



AS mounting system

Battery backup versions:

TL60424005	2 x 10W / 2200lm 840 230V HFE3 M25 AS	4,8 kg
TL60424006	2 x 10W / 2200lm 840 230V HFE3 M25 GL	5,0 kg
TL60724005	2 x 20W / 4500lm 840 230V HFE3 M25 AS	6,8 kg
TL60724006	2 x 20W / 4500lm 840 230V HFE3 M25 GL	6,8 kg



GL mounting system