

DL40 DOWNLIGHTS LED

Application:	Crew and public areas as cabins, corridors, stair-cases, lounges and shopping areas
Housing:	Solid die casted aluminum with integrated trim
Color:	White painted (RAL 9016), chrome or gold anodized
Diffuser:	High gloss faceted reflector
Cable entry:	Cable with quick connector (Wago, Ensto or Wieland) or push-in terminal block
Ballast	Integrated
Light source (incl.):	LED
Light output:	Between 315 - 889 lm
Light distribution	25, 40 or 60°
Tilttable	20° (except for DL40-R70F)
Mounting:	Springs



DL40-R70A



DL40-R70F




DL40-R92A



DL40-R180A

With a weight range from 180g to 280g, these are the smallest Glamox downlights to date. The DL40 downlights are available in three different sizes: Ø70, Ø92 and Ø108.

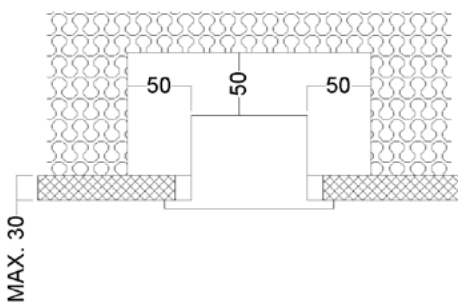

PART NO.

DL40528929 - DL40-R70F LED 400 HF 830 1xQCA 40° CH
DL40528977 - DL40-R92A LED 700 HF 830 1xQCA 60° WH
DL40530565 - DL40-R108A LED 700 HF 830 25° WH
DL40530574 - DL40-R70F LED 550 HF 830 1C 40° CH
DL40531770 - DL40-R108A LED 900 HF 830 1xQCA 60° WH

WEIGHT

0.3kg
0.4kg
0.4kg
0.3kg
0.4kg